

L.N. 95 of 2002

**PRODUCT SAFETY ACT
(ACT NO. V OF 2001)**

**Motor Vehicles (EC Type Approval)
Regulations, 2002**

IN exercise of the powers conferred by articles 38 to 40 of the Product Safety Act, 2001, the Minister for Economic Services, on the advice of the Malta Standards Authority, has made the following regulations:-

1.1. The title of these regulations is the Motor Vehicles (EC Type Approval) Regulations, 2002. Citation and commencement.

1.2. These regulations shall become operative on the 30th November, 2002, hereafter referred to as the effective date.

1.2.1. Provided that for a period of thirty (30) days following the effective date, vehicles, in terms of regulation 2.1.1 of these regulations, which are not in possession of the Certificate of Conformity referred to in regulation 7.1 of these regulations shall, nonetheless, be allowed into Malta if the person placing such vehicles on the market can prove that they had been ordered at least six (6) months prior to the effective date.

1.2.2. Provided that the Malta Transport Authority, set up under the provisions of the Malta Transport Authority Act, shall act as the Maltese 'approval authority' in terms of regulation 3.1.13 of these regulations, from such date as the Minister responsible for consumer affairs, after consultation with the Malta Standards Authority and the Malta Transport Authority, may prescribe.

1.2.3. Provided that the requirement to provide information to the European Commission, referred to in regulation 8.4.1 of these regulations, shall come into force on such date as the Minister responsible for consumer affairs, after consultation with the Malta Standards Authority, may prescribe.

¹ OJ No L 42, 23.2.1970, p. 1. Last amended by Directive 87/403/EEC (OJ No L 220, 8.8.1987, p. 44)

² OJ No L 225, 10.8.1992, p. 1. As Amended by 93/81/EEC, 95/54/EC, 96/27/EC, 96/79/EC, 97/27/EC and 98/14/EC

³ OJ No L 220, 8.8.1987, p. 44

Scope

2.1. These regulations apply to the type-approval of motor vehicles and their trailers built in one or more stages, of systems, components and separate technical units intended for use on such vehicles and trailers.

2.1.1. As far as vehicle type-approval is concerned, these regulations shall apply only for vehicles of Category M1 equipped with an internal combustion engine pending an amendment of the Annexes in accordance with Article 13 of Directive 70/156/EEC¹⁴⁰, as amended by Directive 92/53/EC³, in order to include vehicles of Category M1 powered by engines other than internal combustion engines and other vehicles categories. In the meantime, the provisions of Article 10 of Directive 70/156/EEC, as amended by Directive 87/403/EEC³, shall be applicable to vehicle type-approval of other vehicle categories.

2.1.2. These regulations do not apply to:

- the approval of single vehicles except that when granting such approvals the approval authority shall accept any valid system, component, separate technical unit or incomplete vehicle approval granted under these regulations instead of the relevant national requirement,

- 'quadricycles' within the meaning of Article 1(3) of Council Directive 92/61/EEC relating to the type-approval of two- or three-wheel motor vehicles⁴.

Definitions

3.1. For the purposes of these regulations, the following definitions shall apply:

3.1.1. "The Directive" means Council Directive 92/53/EC, amending Directive 70/156/EEC on the approximation of the laws of the Member States relating to the type-approval of motor vehicles and their trailers;

3.1.1.1. "Separate Directive" means a Directive specified in Annex IV or XI to the Directive (reproduced as Schedule IV or XI hereto);

3.1.2. "Type-approval" means the procedure whereby a Member State certifies that a type of vehicle, system, component or separate technical unit satisfies the relevant technical requirements of the Directive or a separate Directive;

3.1.3. "Multi-stage type-approval" means the procedure whereby one or more Member States certify that, depending on the state of

¹⁴⁰ OJ No L 225, 10.8.1992, p. 72.

completion, an incomplete or completed vehicle type satisfies the relevant technical requirements of the Directive;

3.1.4. "Vehicle" means any motor vehicle intended for use on the road, being complete or incomplete, having at least four wheels and a maximum design speed exceeding 25 km/h, and its trailers, with the exception of vehicles which run on rails and of agricultural and forestry tractors and all mobile machinery;

3.1.5. "Base vehicle" means any incomplete vehicle, the vehicle identification number of which is retained during subsequent stages of the multi-stage type-approval process;

3.1.6. "Incomplete vehicle" means any vehicle which still needs completion in at least one further stage in order to meet all the relevant requirements of the Directive;

3.1.7. "Completed vehicle" means a vehicle resulting from the process of multi-stage type-approval which meets all the relevant requirements of the Directive;

3.1.8. "Type of vehicle" means vehicles of one category which do not differ in at least the essential respects specified in Annex IIB to the Directive (reproduced as Schedule IIB hereto). A type of vehicle may contain variants and versions (see Annex IIB to the Directive, reproduced as Schedule IIB hereto);

3.1.9. "System" means any vehicle system such as brakes, emission control equipment, interior fittings, etc. which is subject to the requirements in any of the separate Directives,

3.1.10. "Component" means a device, such as a lamp, subject to the requirements of a separate Directive, intended to be part of a vehicle, which may be type-approved independently of a vehicle where the separate Directive makes express provisions for so doing;

3.1.11. "Separate technical unit" means a device, such as a rear protective device, subject to the requirements of a separate Directive, intended to be part of a vehicle, which may be type-approved separately but only in relation to one or more specified types of vehicle, where the separate Directive makes express provisions for so doing;

3.1.12. "Manufacturer" means the person or body who is responsible to the approval authority for all aspects of the type-approval process and for ensuring conformity of production. It is not essential that the person or body is directly involved in all stages of the

construction of the vehicle, system, component or separate technical unit which is the subject of the approval process;

3.1.13. "Approval authority" means the competent authority of a Member State which is responsible for all aspects of type-approval of a type of vehicle, system, component or separate technical unit, to issue and (if appropriate) to withdraw approval certificates, to serve as the contact point with the approval authorities of the other Member States and which is responsible for verifying the manufacturer's conformity of production arrangements;

3.1.14. "Technical service" means the organisation or body that has been appointed as a testing laboratory to carry out tests or inspections on behalf of the approval authority of a Member State. This function may also be carried out by the approval authority itself;

3.1.15. "Information document" means the document set out in Annex I or Annex III to the Directive (reproduced as Schedule I and Schedule III hereto) or the corresponding Annex to a separate Directive that prescribes the information to be supplied by an applicant;

3.1.16. "Information folder" means the total folder or file of data, drawings, photographs, etc. supplied by the applicant to the technical service or the approval authority as prescribed in the information document;

3.1.17. "Information package" means the information folder plus any test reports or other documents that the technical service or the approval authority has added to the information folder in the course of carrying out their functions;

3.1.18. "Index to the information package" means the document in which is listed the contents of the information package suitably numbered or otherwise marked to clearly identify all pages.

Application for
Type-Approval.

4.1. Applications for vehicle type-approval shall be submitted by the manufacturer to the approval authority.

4.1.1. An application shall be accompanied by an information folder containing the information required by Annex III to the Directive (reproduced as Schedule III hereto) and by the approval certificates for each of the applicable separate Directives as required by Annex IV or XI to the Directive (reproduced as Schedule IV and Schedule XI hereto); also, the information package for system and separate technical unit approvals in respect of each separate Directive shall be made available to the approval authority throughout the period up to the date when the approval is either issued or refused.

4.2. By way of derogation from regulation 4.1, in the case where no approval certificates for any of the relevant separate Directives are available, the documents accompanying an application shall comprise an information folder containing the relevant information required by Annex I to the Directive (reproduced as Schedule I hereto) in relation to the separate Directives specified in Annex IV or XI to the Directive (reproduced as Schedule IV and Schedule XI hereto) and, where applicable, Part II of Annex III to the Directive (reproduced as Schedule III hereto).

4.3. In the case of multi-stage type-approval the information to be supplied shall consist of:

4.3.1. *at stage 1*: those parts of the information folder and the approval certificates as required for a complete vehicle which are relevant to the state of completion of the base vehicle,

4.3.2. *at the second and subsequent stages*: those parts of the information folder and the approval certificates which are relevant to the current stage of construction and a copy of the approval certificate for the incomplete vehicle issued at the previous stage of build. In addition, the manufacturer shall supply full details of the changes and additions carried out by him to the incomplete vehicle.

4.4. Applications for system component or separate technical unit type-approval shall be submitted by the manufacturer to the approval authority. An application shall be accompanied by an information folder, the contents of which is given in the information document in the relevant separate Directive.

4.5. No application in respect of one type of vehicle, system, component or separate technical unit may be submitted to more than one Member State. A separate application shall be submitted for each type to be approved.

5.1. The approval authority shall grant:

The Type-Approval Process.

5.1.1. vehicle type-approval to:

➤ vehicle types which conform to the particulars in the information folder and which meet the technical requirements of all the relevant separate Directives as prescribed in Annex IV to the Directive (reproduced as Schedule IV hereto),

➤ special-purpose vehicle types mentioned in Annex XI to the Directive (reproduced as Schedule XI hereto) which conform to the particulars in the information folder and which meet the technical requirements of the separate Directives as denoted in the

relevant column of Annex XI to the Directive (reproduced as Schedule XI hereto).

This process shall be satisfied by the procedures described in Annex V to the Directive (reproduced as Schedule V hereto);

5.1.2. multi-stage type-approval to base, incomplete or completed vehicle types which conform to the particulars in the information folder and which meet the technical requirements of the relevant separate Directives as prescribed in Annex IV or XI to the Directive (reproduced as Schedule IV and Schedule XI hereto) taking account of the state of completion of the vehicle type.

This process shall be satisfied by the procedures described in Annex XIV to the Directive (reproduced as Schedule XIV hereto);

5.1.3. system type-approval to vehicle types which conform to the particulars in the information folder and which meet the technical requirements of the relevant separate Directive as mentioned in Annex IV or XI to the Directive (reproduced as Schedule IV and Schedule XI hereto);

5.1.4. component or separate technical unit type-approval to all types of component or separate technical unit which conform to the particulars in the information folder and which meet the technical requirements contained in the relevant separate Directive as mentioned in Annex IV or XI to the Directive (reproduced as Schedule IV and Schedule XI hereto) which makes express provision for so doing.

In the case of a vehicle approval relating to Annex XI to the Directive (reproduced as Schedule XI hereto) or to regulation 8.2.3 of these regulations, or in case of a system, component, or separate technical unit approval relating to Annex XI to the Directive (reproduced as Schedule XI hereto) or to regulation 8.2.3 of these regulations and including restrictions or exemptions from some provisions of the relevant separate Directive, the approval certificate shall include the restrictions on its validity and the exemptions granted and shall be given a special approval number according to the provisions of Annex VII to the Directive (reproduced as Schedule VII hereto).

Where particulars in the information folders referred to in regulations 5.1.1, 5.1.2, 5.1.3 and 5.1.4 of these regulations specify provisions for special purpose vehicles as denoted in the relevant columns of Annex XI to the Directive (reproduced as Schedule XI hereto) and its Appendices, the type-approval certificate shall also specify such provisions and exemptions.

5.2. However, if the approval authority finds that a vehicle, system, component or separate technical unit which complies with the provisions of regulation 5.1 of these regulations is nevertheless, a serious risk to road safety, it may refuse to grant the type-approval.

5.2.1. It shall forthwith inform the other Member States and the Commission thereof, stating the reasons on which its decision is based.

5.3. The approval authority shall complete all applicable sections of a type-approval certificate (models for which are given in Annex VI to the Directive, reproduced as Schedule VI hereto, and in an Annex to each of the separate Directives) for each type of vehicle, system, component or separate technical unit which it approves and, in addition, shall complete the relevant sections of the test results attachment to the vehicle approval certificate (the model for which is given in Annex VIII to the Directive, reproduced as Schedule VIII hereto) and shall compile or verify the contents of the index to the information package. Approval certificates shall be numbered in accordance with the method described in Annex VII to the Directive (reproduced as Schedule VII hereto). The completed certificate and its attachments shall be delivered to the applicant.

5.4. Where the component or the separate technical unit to be approved fulfils its function or offers a specific feature only in conjunction with other parts of the vehicle and for this reason compliance with one or more requirements can be verified only when the component or separate technical unit to be approved operates in conjunction with other vehicle parts, whether real or simulated, the scope of the type-approval of the component or the separate technical unit must be restricted accordingly. The type-approval certificate for a component or a separate technical unit shall then include any restrictions on its use and shall indicate any conditions for fitting it. Observance of these restrictions and conditions shall be verified at the time of type-approval of the vehicle.

5.5. The approval authority shall, within one month, send to the approval authorities of the other Member States a copy of the vehicle type-approval certificate (together with its attachments) for each vehicle type which it has approved or refused to approve or withdrawn.

5.6. The approval authority shall send monthly to the approval authorities of the Member States a list (containing the particulars shown in Annex XIII to the Directive, reproduced as Schedule XIII hereto) of the system, component or separate technical unit approvals it has granted, refused to grant or withdrawn during that month; in addition, on receiving an application from the approval authority of another Member State, it shall send forthwith a copy of the system, component or separate

technical unit type-approval certificate and/or information package for each type of system, component or separate technical unit which it has approved or refused to approve or withdrawn.

Amendments to
Type Approvals.

6.1. The approval authority must take the necessary measures to ensure that it is informed of any change in the particulars appearing in the information package.

6.2. The application for amendment of a type-approval shall be submitted exclusively to the Member State which granted the original type-approval.

6.3. In the case of system, component or separate technical unit approval, if particulars appearing in the information package have changed, the approval authority shall issue revised page(s) of the information package as necessary, marking each revised page to show clearly the nature of the change and the date of re-issue; a consolidated, updated version of the information package accompanied by a detailed description of the change shall also be deemed to meet this requirement.

6.3.1. On any occasion when revised pages or a consolidated, updated version are issued, the index to the information package (which is attached to the approval certificate) shall also be amended to show the latest dates of revised pages or the date of the consolidated, updated version.

6.3.2. If, in addition, any information on the approval certificate (excluding its attachments) has changed or the requirements of the Directive have changed since the date currently on the approval, the amendment shall be designated as 'extension' and the approval authority shall issue a revised approval certificate (denoted by an extension number) which shall show clearly the reason for extension and the date of re-issue.

6.3.3. If the approval authority finds that an amendment to an information package warrants fresh tests or checks, it shall inform the manufacturer thereof and issue the documents mentioned in regulations 6.3, 6.3.1 and 6.3.2 of these regulations only after the conduct of successful fresh tests or checks.

6.4. In the case of vehicle type-approval, if particulars appearing in the information package have changed, the approval authority shall issue revised page(s) of the information package as necessary, marking each revised page to show clearly the nature of the change and the date of re-issue; a consolidated, updated version of the information package accompanied by a detailed description of the change shall also be deemed to meet this requirement.

6.4.1. On any occasion when revised pages or a consolidated, updated version are issued, the index to the information package (which is attached to the approval certificate) shall also be amended to show the latest dates of revised pages or the date of the consolidated, updated version.

6.4.2. If, in addition, either further inspections are required or any information on the approval certificate (excluding its attachments) has changed or the requirements of any of the separate Directives applicable to the date from which first entry into service is prohibited have changed since the date currently on the vehicle approval, the amendment shall be designated as 'extension' and the approval authority shall issue a revised approval certificate (denoted by an extension number) which shall show clearly the reason for extension and the date of re-issue.

6.4.3. If the approval authority finds that an amendment to an information package warrants fresh inspections, it shall inform the manufacturer thereof and issue the documents mentioned in regulations 6.4, 6.4.1 and 6.4.2 of these regulations only after the conduct of successful fresh inspections. Any revised document shall be sent to all other approval authorities within one month.

6.5. Where it becomes apparent that a vehicle type-approval is about to become invalid because one or more of the separate Directive approvals referred to in its information package is about to become invalid or because of the introduction of a new separate Directive in Annex IV to the Directive (reproduced as Schedule IV hereto), Part I, the approval authority shall, not less than one month before the vehicle type-approval ceases to be valid, communicate that fact to the approval authorities of the other Member States together with an indication of the relevant date or the vehicle identification number of the last vehicle produced in conformity with the old certificate.

6.6. For vehicle categories not affected by a change of requirements in separate Directives or in the Directive, no amendment to the approval shall be required.

7.1. The manufacturer, in his capacity as the holder of a vehicle type-approval, shall issue a certificate of conformity (models for which are given in Annex IX to the Directive, reproduced as Schedule IX hereto), which shall accompany each vehicle, whether complete or incomplete, manufactured in conformity with the approved vehicle type.

Certificate of
Conformity

7.1.1. In the case of an incomplete or completed vehicle type, the manufacturer shall complete only those items on Side 2 of the

certificate of conformity which have been added or changed at the current stage of approval and, if applicable, shall attach to this certificate all certificates of conformity delivered at the previous stage(s).

7.1.2. The certificate of conformity shall be made in such a way to prevent any forgery. For this purpose, the printing shall be made on paper protected either by coloured graphics or watermarked with the manufacturer's identification mark.

7.2. However, for purposes of vehicle taxation¹ or registration, after giving at least three months' notice to the Commission and the other Member States, particulars not mentioned in Annex IX to the Directive (reproduced as Schedule IX hereto) may be requested to be added to the certificate, provided that such particulars are explicitly stated in the information package or can be derived from it by a simple calculation.

7.2.1. The certificate of conformity contained in Annex IX to the Directive (reproduced as Schedule IX hereto) may be requested to be completed in such a way as to highlight the data necessary and sufficient for the purposes of taxation and registration by the approval authority.

7.3. The manufacturer, in his capacity as the holder of a type-approval for a component or separate technical unit shall affix to each component or unit manufactured in conformity with the approved type the trade name or mark, the type and/or, if the separate Directive so provides, the type-approval mark or number.

7.3.1. However, in the latter case, the manufacturer may choose not to affix the trade name or mark and type.

7.3. The manufacturer, in his capacity as the holder of a type-approval certificate, which in accordance with the provisions of regulation 5.4 of these regulations includes restrictions on its use, shall deliver with each component or unit manufactured detailed information on these restrictions and shall indicate any conditions for fitting it.

Registration and
entry into service

8.1. On grounds relating to the construction and functioning of new vehicles, their registration, sale or entry into service shall be permitted if, and only if, they are accompanied by a valid certificate of conformity.

8.1.1. So long as they are not completed, the sale of incomplete vehicles shall be permitted but their permanent registration and entry into service may be refused.

¹ The Motor Vehicles Registration Tax Act, Cap. 368.

8.2. The sale or entry into service of components or separate technical units shall be permitted if, and only if, they comply with the requirement of the relevant separate Directive and the requirements referred to in regulation 7.3 of these regulations provided that this shall not apply to components and separate technical units intended for use on vehicles which are fully or partially exempt from or not covered by the Directive.

8.3. If it is found that vehicles, components or separate technical units of a particular type are a serious risk to road safety, although they are accompanied by a valid certificate of conformity or are properly marked, then the registration of such vehicles may be refused or the sale or entry into service in Malta of such vehicles, components or separate technical units may be prohibited, for a maximum period of six months.

8.4. The Consumer and Industrial Goods Directorate⁶ of the Malta Standards Authority shall be notified forthwith, stating the reasons on which such decision is based.

8.4.1. The Consumer and Industrial Goods Directorate of the Malta Standards Authority shall immediately inform the Commission and other Member States of any measures taken in pursuance of regulation 8.3.

8.5. If the Member State which granted type-approval disputes the risk to road safety notified to it, both parties concerned shall endeavour to settle the dispute. The Commission shall be kept informed and shall, where necessary, hold appropriate consultations for the purpose of reaching a settlement.

9.1. The requirements of regulation 8.1 of these regulations do not apply to:

Exemptions and
alternative
procedures.

➤ vehicles intended for use by the armed services, civil defence, fire services and forces responsible for maintaining public order,

➤ vehicles approved in accordance with regulation 9.2.

9.2. The approval authority may, at the request of the manufacturer, exempt from one or more of the provisions of one or more of the separate Directives:

9.2.1. *Vehicles produced in small series*

⁶ L.N. 213 of 2000 - Malta Standards Authority (Establishment of Directorates) Order, 2000, published in the Government Gazette No. 17,002 of 20th October, 2000.

In this case, the number of vehicles of a family of types per year registered, sold or entering service in Malta shall be limited to not more than the number of units shown in Annex XII to the Directive (reproduced as Schedule XII hereto). Each year the approval authority shall send to the Commission a list of such approvals. The approval authority shall send a copy of the approval certificate and its attachments to the approval authorities of the other Member States designated by the manufacturer, stating the nature of exemptions which have been granted. Within three months these Member States shall decide whether, and for which number of units, they accept the type-approval for vehicles to be registered within their territory. For the purposes of approvals granted in accordance with this regulation, the requirements of regulations 4, 5, 6, 7, 11 and 12 of these regulations shall apply only in so far as they are deemed to be relevant by the approval authority. Where an exemption is granted in accordance with this regulation the approval authority may require a relevant alternative provision;

9.2.2. *End-of-series vehicles*

9.2.2.1. Within the limits contained in Annex XII to the Directive (reproduced as Schedule XII hereto), Section B and for a limited period the approval authority may register and permit the sale or entry into service of new vehicles conforming to a type of vehicle whose type-approval is no longer valid under regulation 6.5 of these regulations.

This provision shall apply only to vehicles which:

- were in the territory of the European Community, and
- were accompanied by a valid certificate of conformity which had been issued when the type-approval of the vehicle in question was still valid, but which had not been registered or put into service before the said type-approval lost its validity.

This option shall be limited to a period of 12 months for complete vehicles and 18 months for vehicles completed as from the date on which the type-approval lost its validity.

9.2.2.2. For regulation 9.2.2.1 of these regulations to be applied to one or more types of a given category, the manufacturer must submit a request to the approval authority. The request must specify the technical and/or economic reasons on which it is based. Within three months the approval authority shall decide whether and for which number of units, it accepts the vehicle type concerned to be registered within the Maltese territory. The approval authority shall be responsible for ensuring that the manufacturer complies with the provisions of Annex XIIB to the

Directive (reproduced as Schedule XIIB hereto). The approval authority shall each year send the Commission a list of exemptions granted.

9.2.3. Vehicles, components or separate technical units incorporating technologies or concepts which cannot, owing to their specific nature, comply with one or more of the requirements of one or more of the separate Directives

9.2.3.1. In this case, the approval authority may grant an approval restricted in validity to the Maltese territory, but shall within one month of so doing, send a copy of the approval certificate and its attachments to the approval authorities of the other Member States and to the Commission. At the same time, it shall send a request to the Commission to be allowed to grant a type-approval in accordance with the Directive. The request shall be accompanied by a file containing the following elements:

- the reason why the technologies or concepts in question prevent the vehicle, component or separate technical unit from complying with the requirements of one or more of the relevant separate Directives,
- a description of the areas of safety and environmental protection concerned and the measures taken,
- a description of the tests and their results that demonstrate at least an equivalent level of safety and environmental protection as is provided by the requirements of one or more of the relevant separate Directives,
- proposals for amendments to the relevant separate Directives or new separate Directive(s) as applicable.

9.3. Approval certificates issued in accordance with regulation 9.2 of these regulations, the models for which are shown in Annex VI to the Directive (reproduced as Schedule VI hereto), may not carry the heading 'EEC Vehicle Type-Approval Certificate', except in the case mentioned in regulation 9.2.3 where the Commission has approved the report.

10.1. The equivalence of the international regulations listed in Part II of Annex IV to the Directive (reproduced as Schedule IV hereto) with the corresponding separate Directives shall be recognized by the approval authority, which shall thus accept approvals according to those regulations and, where applicable, the pertaining approval marks, in lieu of the corresponding approvals and/or approvals marks according

Acceptance of
equivalent
approvals.

to the equivalent separate Directives. The listed international regulations are those published in the Official Journal of the European Communities.

Conformity of
production
arrangements

11.1. The approval authority shall take the necessary measures in accordance with Annex X to the Directive (reproduced as Schedule X hereto) in relation to that approval to verify, if need be in cooperation with the approval authorities of the other Member States, that adequate arrangements have been made to ensure that production vehicles, systems, components or separate technical units, as the case may be, conform to the approved type.

11.2. The approval authority which has granted a type approval shall take the necessary measures in accordance with Annex X to the Directive (reproduced as Schedule IV hereto) in relation to that approval to verify, if need be in cooperation with the approval authorities of the other Member States, that the arrangements referred to in regulation 11.1 of these regulations continue to be adequate and that production vehicles, systems, components or separate technical units, as the case may be, continue to conform to the approved type. Verification to ensure that products conform to the approved type shall be limited to the procedures set out in Section 2 and 3 of Annex X to the Directive (reproduced as Schedule X hereto) and in those separate Directives that contain specific requirements.

Nonconformity with
the approved type.

12.1. There shall be failure to conform to the approved type where deviations from the particulars in the type-approval certificate and/or the information package are found to exist and where these deviations have not been authorised under regulations 6.3 and 6.4 of these regulations, by the approval authority which granted the type-approval. A vehicle shall not be considered to deviate from the approved type where tolerances are permitted by separate Directives and these tolerances are respected.

12.2. If the approval authority which has granted type-approval finds that vehicles, components or separate technical units accompanied by a certificate of conformity or bearing an approval mark do not conform to the type it has approved, it shall take the necessary measures to ensure that production vehicles, components or separate technical units, as the case may be, again conform to the approved type. The approval authority shall advise those of the other Member States of the measures taken which may, where necessary, extend to withdrawal of type-approval.

12.3. If the approval authority demonstrates that vehicles, components or separate technical units accompanied by a certificate of conformity or bearing an approval mark do not conform to the approved

type it may request the Member State which granted the type-approval to verify that vehicles, components or separate technical units, as the case may be, in production conform to the approved type. Such action shall be taken as soon as possible and in any case within six months of the date of the request.

12.4. In the case of:

- vehicle type-approval where the nonconformity of a vehicle arises exclusively from the nonconformity of a system, component or separate technical unit, or
- multi-stage type-approval where the nonconformity of a completed vehicle arises exclusively from the nonconformity of a system, component or separate technical unit being part of the incomplete vehicle, or of the incomplete vehicle itself,

the approval authority shall request the Member State(s) which granted any relevant system, component, separate technical unit or incomplete vehicle type-approval(s) to take the necessary action to ensure that vehicles in production again conform to the approved type. Such action shall be taken as soon as possible and in any case within six months of the date of the request, if necessary in conjunction with the Member State making the request. Where a failure to conform is established, the approval authorities of the Member State which granted the system, component or separate technical unit type-approval or the approval of the incomplete vehicle shall take the measures set out in regulation 12.2.

12.5. The approval authority shall inform approval authorities of other Member States within one month of any withdrawal of type-approval and of the reasons for such a measure.

13.1. All decisions taken by the approval authority pursuant to the provisions implementing these regulations and the Directive and other provisions regarding refuse or withdrawal of type-approval, or refuse of registration or prohibit sale, shall state in detail the reasons on which they are based. Any decisions shall be notified by the approval authority to the party concerned who shall at the same time, be informed of the remedies available to him under the laws in force in Malta and of the time limits allowed for the exercise of such remedies.

Notification of
decisions and
remedies available.

14.1. Copies of EEC and EC Directives referred to in these regulations and listed in Schedule IV or XI to these regulations can be obtained from the Consumer and Industrial Goods Directorate of the Malta Standards Authority.

Copies of EEC and
EC Directives.

LIST OF SCHEDULES, BASED ON ANNEXES TO THE DIRECTIVE

Schedule	Based on Annex to The Directive	Contents
I	I	Complete list of information for the purposes of vehicle type-approval
II	II	Definition of vehicle category and vehicle types
III	III	Information document for the purposes of vehicle type-approval
IV	IV	List of requirements for the purposes of vehicle type-approval
V	V	Procedures to be followed during vehicle approval
VI	VI	EEC vehicle type-approval certificate
VII	VII	Approval numbering system
VIII	VIII	Test results
IX	IX	Certificate of conformity
X	X	Conformity of production procedures
XI	XI	Nature of and provisions for special purpose vehicles
XII	XII	Small series limits and end-of-series limits
XIII	XIII	List of separate Directive approvals issued
XIV	XIV	Procedures to be followed during multi-stage type-approval
XV	XV	Declaration of the manufacturer of base/incomplete vehicles of categories other than M1

Schedule I

Based on Annex I of the Directive

COMPLETE LIST OF INFORMATION FOR THE PURPOSES OF VEHICLE TYPE-APPROVAL
(All information documents in this Directive and in separate Directives must consist only of extracts from, and adhere to the item numbering system of, this total list.)

The following information, if applicable, must be supplied in triplicate and include a list of contents. Any drawings must be supplied in appropriate scale and in sufficient detail on size A4 or on a folder of A4 format. Photographs, if any, must show sufficient detail.

If the systems, components or separate technical units have electronic controls information concerning their performance must be supplied

0. GENERAL

- 0 1 Make (trade name of manufacturer):
- 0 2 Type:
- 0 2 1 Commercial name(s) (if available)
- 0 3 Means of identification of type, if marked on the vehicle ^{1b)}
- 0 3 1 Location of that marking:
- 0 4 Category of vehicle ^{1c)}
- 0 4 1 Classification(s) according to the dangerous goods which the vehicle is intended to transport:
.....
- 0 5 Name and address of manufacturer:
- 0 6 Location of statutory plates and inscriptions and method of affixing
- 0 6 1 On the chassis:
- 0 6 2 On the bodywork:
- 0 7 In the case of components and separate technical units, location and method of affixing of the EC approval mark:
- 0 8 Address(es) of assembly plant(s):

B 1156

1. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE

- 1.1. Photographs and/or drawings of a representative vehicle:
- 1.2. Dimensional drawing of the whole vehicle:
- 1.3. Number of axles and wheels:
- 1.3.1. Number and position of axles with double wheels:
- 1.3.2. Number and position of steered axles:
- 1.3.3. Powered axles (number, position, interconnection):
- 1.4. Chassis (if any) (overall drawing):
- 1.5. Material used for the side-members ^(a):
- 1.6. Position and arrangement of the engine:
- 1.7. Driving cab (forward control or bonneted) ^(a):
- 1.8. Hand of drive: left/right ⁽¹⁾
- 1.8.1. Vehicle is equipped to be driven in right/left ⁽¹⁾ hand traffic
- 1.9. Specify if the motor vehicle is intended to tow semi-trailers or other trailers and if the trailer is a semi-, drawbar or centre-axle trailer; specify vehicles specially designed for the controlled-temperature carriage of goods:

2. MASSES AND DIMENSIONS ^(a) (in kg and mm) (Refer to drawing where applicable)

- 2.1. Wheel base(s) (fully loaded) ^(b):
- 2.1.1. In the case of semi-trailers
- 2.1.1.1. Distance between the axis of the fifth wheel king-pin and the rearmost end of the semi-trailer:
- 2.1.1.2. Maximum distance between the axis of the fifth wheel king-pin and any point on the front of the semi-trailer:
- 2.1.1.3. Semi-trailer special wheelbase (as defined in Section 7.6.1.2 of Annex I to Directive 97/27/EC):

2.2	In the case of semi-trailer towing vehicles
2.2.1	⁽¹⁾ Fifth wheel load (maximum and minimum, indicate the permissible values in the case of an incomplete vehicle ^(1a)
2.2.2	Maximum height of the fifth wheel (standardised) ^(1b)
2.3	Axle track(s) and width(s)
2.3.1	Track of each steered axle ⁽¹⁾
2.3.2	Track of all other axes ⁽¹⁾
2.3.3	Width of the widest rear axle*
2.3.4	Width of the foremost axle (measured at the outermost part of the tyres excluding the bulging of the tyres close to the ground)*
2.4	Range of vehicle dimensions (overall)
2.4.1	For chassis without bodywork
2.4.1.1	Length ⁽¹⁾
2.4.1.1.1	Maximum permissible length*
2.4.1.1.2	Minimum permissible length
2.4.1.2	Width ^(1a)
2.4.1.2.1	Maximum permissible width
2.4.1.2.2	Minimum permissible width
2.4.1.3	Height (in running order) ^(1b) (for suspensions adjustable for height, indicate normal running position)
2.4.1.4	Front overhang ^(1a)
2.4.1.4.1	Approach angle ^(1a2) .. degrees
2.4.1.5	Rear overhang ⁽¹⁾
2.4.1.5.1	Departure angle ^(1a2) .. degrees
2.4.1.5.2	Minimum and maximum permissible overhang of the coupling point ^(1a2)

2.4.1.6	Ground clearance (as defined in Point 4.5 of Section A of Annex II to Directive 70/156/EEC)
2.4.1.6.1	Between the axles:
2.4.1.6.2	Under the front axle(s):
2.4.1.6.3	Under the rear axle(s):
2.4.1.7	Ramp angle ^(inc) degrees
2.4.1.8	Extreme permissible positions of the centre of gravity of the body and/or interior fittings and/or equipment and/or payload:
2.4.2	For chassis with bodywork
2.4.2.1	Length ^(gl) :
2.4.2.1.1	Length of the loading area:
2.4.2.2	Width ^(kl) :
2.4.2.2.1	Thickness of the walls (in the case of vehicles designed for controlled-temperature carriage of goods):
2.4.2.3	Height (in running order) ^(ll) (for suspensions adjustable for height, indicate normal running position)
2.4.2.4	Front overhang ^(m)
2.4.2.4.1	Approach angle ^(ma) degrees
2.4.2.5	Rear overhang ⁽ⁿ⁾
2.4.2.5.1	Departure angle ^(nb) degrees
2.4.2.5.2	Minimum and maximum permissible overhang of the coupling point ^(nd) :
2.4.2.6	Ground clearance (as defined in Point 4.5 of Section A of Annex II to Directive 70/156/EEC)
2.4.2.6.1	Between the axles:
2.4.2.6.2	Under the front axle(s):
2.4.2.6.3	Under the rear axle(s):
2.4.2.7	Ramp angle ^(nc) degrees
2.4.2.8	Extreme permissible positions of the centre of gravity of the payload (in the case of non-uniformed load):

2.5	Mass of the bare chassis (without cab, coolant, oils, fuel, spare wheel, tools and driver):
2.5.1	Distribution of this mass among the axles:
2.6	Mass of the vehicle with bodywork, and with coupling device in the case of a towing vehicle of category other than M ₁ , in running order, or mass of the chassis with cab if the manufacturer does not fit the bodywork and/or coupling device (including coolant, oils, fuel, 100% other liquids except used waters, tools, spare wheel and driver and, for buses and coaches, the mass of the crew member (75 kg) if there is a crew seat in the vehicle) ^(a) (maximum and minimum for each variant):
2.6.1	Distribution of this mass among the axles and, in the case of a semi-trailer or centre-axle trailer, load on the coupling point (maximum and minimum for each variant):
2.7	Minimum mass of the completed vehicle as stated by the manufacturer, in the case of an incomplete vehicle:
2.7.1	Distribution of this mass among the axles and, in the case of a semi-trailer or centre-axle trailer, load on the coupling point:
2.8	Technically permissible maximum laden mass stated by the manufacturer ^(b) (maximum and minimum for each variant):
2.8.1	Distribution of this mass among the axles and, in the case of a semi-trailer or centre-axle trailer, load on the coupling point (maximum and minimum for each variant):
2.9	Technically permissible maximum load/mass on each axle:
2.10	Technically permissible maximum load/mass on each axle group:
2.11	Technically permissible maximum towable mass of the motor vehicle in case of
2.11.1	Drawbar trailer:
2.11.2	Semi-trailer:
2.11.3	Centre-axle trailer:
2.11.3.1	Maximum ratio of the coupling overhang ^(p) to the wheel base:
2.11.3.2	Maximum V-value: kN
2.11.4	Technically permissible maximum mass of the combination:
2.11.5	Vehicle is/is not ⁽¹⁾ suitable for towing loads (Item 1.2 of Annex II to Directive 77/389/EEC)
2.11.6	Maximum mass of unbraked trailer:

B 1160

- 2.12. Technically permissible maximum static vertical load/mass on the vehicle's coupling point:
- 2.12.1 Of the motor vehicle:
- 2.12.2 Of the semi-trailer or centre-axle trailer:
- 2.12.3 Maximum permissible mass of the coupling device (if not fitted by the manufacturer):
- 2.13. Swept path:
- 2.14 Engine power/maximum mass ratio:.....kW/kg
- 2.14.1 Engine power/technically permissible maximum laden mass of the combination ratio (as defined in Section 7.10 of Annex I to Directive 97/27/EC)..... kW/kg
- 2.15. Hill-starting ability (solo vehicle):..... %
- 2.16. Intended registration/in service maximum permissible masses (optional: where these values are given, they shall be verified in accordance with the requirements of Annex IV to Directive 97/27/EC):
- 2.16.1 Intended registration/in service maximum permissible laden mass (maximum and minimum):.....
- 2.16.2. Intended registration/in service maximum permissible mass on each axle and in the case of a semi-trailer or centre-axle trailer, intended load on the coupling point stated by the manufacturer if lower than the technically permissible maximum mass on their coupling point (maximum and minimum):
- 2.16.3. Intended registration/in service maximum permissible mass on each axle group:
- 2.16.4. Intended registration/in service maximum permissible towable mass (maximum and minimum):
- 2.16.5. Intended registration/in service maximum permissible mass of the combination (maximum and minimum):

3.	POWER PLANT ^(a)
3.1	Manufacturer
3.1.1	Manufacturer's engine code (as marked on the engine, or other means of identification)
3.2	Internal combustion engine
3.2.1	Specific engine information
3.2.1.1	Working principle: positive ignition/compression ignition, four stroke/two stroke ⁽¹⁾
3.2.1.2	Number and arrangement of cylinders:
3.2.1.2.1	Bore ⁽¹⁾ mm
3.2.1.2.2	Stroke ⁽¹⁾ mm
3.2.1.2.3	Firing order:
3.2.1.3	Engine capacity ^(a) cm ³
3.2.1.4	Volumetric compression ratio ⁽²⁾
3.2.1.5	Drawings of combustion chamber, piston crown and, in the case of positive ignition engines, piston rings
3.2.1.6	Idling speed ⁽²⁾ min ⁻¹
3.2.1.7	Carbon monoxide content by volume in the exhaust gas with the engine idling ⁽²⁾ % as stated by the manufacturer (positive ignition engines only)
3.2.1.8	Maximum net power ^(a) kW at min ⁻¹ (manufacturer's declared value)
3.2.1.9	Maximum permitted engine speed as prescribed by the manufacturer: min ⁻¹
3.2.1.10	Maximum net torque ^(a) Nm at min ⁻¹ (manufacturer's declared value)
3.2.2	Fuel: diesel oil/petrol/LPG/any other ⁽¹⁾
3.2.2.1	RON, leaded
3.2.2.2	RON, unleaded
3.2.2.3	Fuel tank inlet restricted orifice/label ⁽¹⁾

B 1162

3.2.3	Fuel tank(s)	
3.2.3.1	Service fuel tank(s)	
3.2.3.1.1	Number, capacity, material:	
3.2.3.1.2	Drawing and technical description of the tank(s) with all connections and all lines of the breathing and venting system, locks, valves, fastening devices:	
3.2.3.1.3	Drawing clearly showing the position of the tank(s) in the vehicle:	
3.2.3.2	Reserve fuel tank(s)	
3.2.3.2.1	Number, capacity, material:	
3.2.3.2.2	Drawing and technical description of the tank(s) with all connections and all lines of the breathing and venting system, locks, valves, fastening devices:	
3.2.3.2.3	Drawing clearly showing the position of the tank(s) in the vehicle:	
3.2.4	Fuel feed	
3.2.4.1	By carburettor(s): yes/no ⁽¹⁾	
3.2.4.1.1	Make(s)	
3.2.4.1.2	Type(s)	
3.2.4.1.3	Number fitted	
3.2.4.1.4	Adjustments ⁽²⁾	
3.2.4.1.4.1	Jets:	
3.2.4.1.4.2	Venturis	
3.2.4.1.4.3	Float-chamber level	
3.2.4.1.4.4	Mass of float	
3.2.4.1.4.5	Float needle	
3.2.4.1.5	Cold start system: manual/automatic ⁽¹⁾	
3.2.4.1.5.1	Operating principle(s)	
3.2.4.1.5.2	Operating limits/settings ⁽¹⁾⁽²⁾	

Or the curve of fuel delivery plotted against the air flow and settings required to keep to the curve

- 3.2.4.2 By fuel injection (compression ignition only): yes/no ⁽¹⁾
- 3.2.4.2.1. System description:
- 3.2.4.2.2. Working principle: direct injection/pre-chamber/swirl chamber ⁽¹⁾
- 3.2.4.2.3 Injection pump
- 3.2.4.2.3.1 Make(s):
- 3.2.4.2.3.2 Type(s):
- 3.2.4.2.3.3 Maximum fuel delivery ⁽¹⁾⁽²⁾: mm³/stroke or cycle at a pump speed of min⁻¹
or, alternatively, a characteristic diagram:
- 3.2.4.2.3.4 Injection timing ⁽²⁾:
- 3.2.4.2.3.5. Injection advance curve ⁽²⁾:
- 3.2.4.2.3.6 Calibration procedure: test bench/engine ⁽¹⁾
- 3.2.4.2.4 Governor
- 3.2.4.2.4.1. Type:
- 3.2.4.2.4.2. Cut-off point
- 3.2.4.2.4.2.1. Cut-off point under load: min⁻¹
- 3.2.4.2.4.2.2. Cut-off point without load: min⁻¹
- 3.2.4.2.5 Injection piping
- 3.2.4.2.5.1. Length: mm
- 3.2.4.2.5.2. Internal diameter: mm
- 3.2.4.2.6 Injector(s)
- 3.2.4.2.6.1. Make(s):
- 3.2.4.2.6.2. Type(s):
- 3.2.4.2.6.3. Opening pressure ⁽²⁾: kPa or characteristic diagram ⁽²⁾:

B 1164

3.2.4.2.7 Cold start system

3.2.4.2.7.1 Make(s):

3.2.4.2.7.2 Type(s):

3.2.4.2.7.3 Description:

3.2.4.2.8 Auxiliary starting aid

3.2.4.2.8.1 Make(s):

3.2.4.2.8.2 Type(s):

3.2.4.2.8.3 System description:

3.2.4.3 By fuel injection (positive ignition only): yes/no ⁽¹⁾

3.2.4.3.1 Working principle: intake manifold (single-/multi-point ⁽¹⁾)/direct injection/other (specify) ⁽¹⁾:
.....

3.2.4.3.2 Make(s):

3.2.4.3.3 Type(s):

3.2.4.3.4 System description

3.2.4.3.4.1 Type or number of the control unit:

3.2.4.3.4.2 Type of fuel regulator:

3.2.4.3.4.3 Type of air-flow sensor:

3.2.4.3.4.4 Type of fuel distributor:

3.2.4.3.4.5 Type of pressure regulator:

3.2.4.3.4.6 Type of micro switch:

3.2.4.3.4.7 Type of idling adjustment screw:

3.2.4.3.4.8 Type of throttle housing:

3.2.4.3.4.9 Type of water temperature sensor:

3.2.4.3.4.10 Type of air temperature sensor:

3.2.4.3.4.11 Type of air temperature switch:

In the case of systems other than
continuous injection give equivalent
details

3.2.4.3.5	Injectors: opening pressure ⁽²⁾ kPa or characteristic diagram ⁽²⁾
3.2.4.3.6	Injection timing:
3.2.4.3.7	Cold start system
3.2.4.3.7.1	Operating principle(s):
3.2.4.3.7.2	Operating limits/settings ⁽¹⁾⁽²⁾
3.2.4.4	Feed pump
3.2.4.4.1	Pressure ⁽²⁾ kPa or characteristic diagram ⁽²⁾
3.2.5	Electrical system
3.2.5.1	Rated voltage: V, positive/negative ground ⁽¹⁾
3.2.5.2	Generator
3.2.5.2.1	Type:
3.2.5.2.2	Nominal output: VA
3.2.6	Ignition
3.2.6.1	Make(s):
3.2.6.2	Type(s):
3.2.6.3	Working principle:
3.2.6.4	Ignition advance curve ⁽²⁾
3.2.6.5	Static ignition timing ⁽²⁾ degrees before TDC
3.2.6.6	Contact-point gap ⁽²⁾ mm
3.2.6.7	Dwell-angle ⁽²⁾ degrees

B 1166

- 3.2.7 Cooling system (liquid/air) ⁽¹⁾
- 3.2.7.1 Nominal setting of the engine temperature control mechanism:
- 3.2.7.2. Liquid
- 3.2.7.2.1. Nature of liquid:
- 3.2.7.2.2. Circulating pump(s): yes/no ⁽¹⁾
- 3.2.7.2.3. Characteristics: or
- 3.2.7.2.3.1 Make(s):
- 3.2.7.2.3.2. Type(s):
- 3.2.7.2.4 Drive ratio(s):
- 3.2.7.2.5. Description of the fan and its drive mechanism:
- 3.2.7.3. Air
- 3.2.7.3.1. Blower: yes/no ⁽¹⁾
- 3.2.7.3.2. Characteristics: or
- 3.2.7.3.2.1. Make(s):
- 3.2.7.3.2.2. Type(s):
- 3.2.7.3.3. Drive ratio(s):
- 3.2.8. Intake system
- 3.2.8.1. Pressure charger: yes/no ⁽¹⁾
- 3.2.8.1.1. Make(s):
- 3.2.8.1.2. Type(s):
- 3.2.8.1.3. Description of the system (e.g. maximum charge pressure: kPa; wastegate if applicable):
.....
- 3.2.8.2. Intercooler: yes/no ⁽¹⁾
- 3.2.8.3. Intake depression at rated engine speed and at 100% load
minimum allowable: kPa
maximum allowable: kPa

3.2.8.4	Description and drawings of inlet pipes and their accessories (plenum chamber, heating device, additional air intakes, etc.):
3.2.8.4.1	Intake manifold description (include drawings and/or photos):
3.2.8.4.2	Air filter, drawings: or
3.2.8.4.2.1	Make(s):
3.2.8.4.2.2	Type(s):
3.2.8.4.3	Intake silencer, drawings: or
3.2.8.4.3.1	Make(s)
3.2.8.4.3.2	Type(s):
3.2.9	Exhaust system
3.2.9.1	Description and/or drawing of the exhaust manifold:
3.2.9.2	Description and/or drawing of the exhaust system:
3.2.9.3	Maximum allowable exhaust back pressure at rated engine speed and at 100% load: ... kPa
3.2.9.4	Exhaust silencer(s) For front, centre, rear silencer: construction, type, marking; where relevant for exterior noise: reducing measures in the engine compartment and on the engine:
3.2.9.5	Location of the exhaust outlet:
3.2.9.6	Exhaust silencer containing fibrous materials:
3.2.10	Minimum cross-sectional areas of inlet and outlet ports:
3.2.11	Valve timing or equivalent data
3.2.11.1	Maximum lift of valves, angles of opening and closing, or timing details of alternative distribution systems, in relation to dead centres:
3.2.11.2	Reference and/or setting ranges ⁽¹⁾ :
3.2.12	Measures taken against air pollution
3.2.12.1	Device for recycling crankcase gases (description and drawings):

B 1168

- 3.2.12.2. Additional anti-pollution devices (if any, and if not covered by another heading)
- 3.2.12.2.1. Catalytic converter: yes/no ⁽¹⁾
- 3.2.12.2.1.1. Number of catalytic converters and elements:
- 3.2.12.2.1.2. Dimensions, shape and volume of the catalytic converter(s):
- 3.2.12.2.1.3. Type of catalytic action:
- 3.2.12.2.1.4. Total charge of precious metals:
- 3.2.12.2.1.5. Relative concentration:
- 3.2.12.2.1.6. Substrate (structure and material):
- 3.2.12.2.1.7. Cell density:
- 3.2.12.2.1.8. Type of casing for the catalytic converter(s):
- 3.2.12.2.1.9. Location of the catalytic converter(s) (place and reference distance in the exhaust line):
- 3.2.12.2.1.10. Heat shield: yes/no ⁽¹⁾
- 3.2.12.2.2. Oxygen sensor: yes/no ⁽¹⁾
- 3.2.12.2.2.1. Type:
- 3.2.12.2.2.2. Location:
- 3.2.12.2.2.3. Control range:
- 3.2.12.2.3. Air injection: yes/no ⁽¹⁾
- 3.2.12.2.3.1. Type (pulse air, air pump, etc.):
- 3.2.12.2.4. Exhaust gas recirculation: yes/no ⁽¹⁾
- 3.2.12.2.4.1. Characteristics (flow rate, etc.):

- 3.2.12.2.5. Evaporative emissions control system: yes/no ⁽¹⁾
- 3.2.12.2.5.1. Detailed description of the devices and their state of tune:
- 3.2.12.2.5.2. Drawing of the evaporative control system:
- 3.2.12.2.5.3. Drawing of the carbon canister:
- 3.2.12.2.5.4. Mass of dry charcoal:grams
- 3.2.12.2.5.5. Schematic drawing of the fuel tank with indication of capacity and material:
- 3.2.12.2.5.6. Drawing of the heat shield between tank and exhaust system:
- 3.2.12.2.6. Particulate trap: yes/no ⁽¹⁾
- 3.2.12.2.6.1. Dimensions, shape and capacity of the particulate trap:
- 3.2.12.2.6.2. Type and design of the particulate trap:
- 3.2.12.2.6.3. Location (reference distance in the exhaust line):
- 3.2.12.2.6.4. Method or system of regeneration, description and/or drawing:
- 3.2.12.2.7. Other systems (description and operation):
- 3.2.13. Location of the absorption coefficient symbol (compression ignition engines only):
- 3.2.14. Details of any devices designed to influence fuel economy (if not covered by other items):
- 3.3. Electric motor
- 3.3.1. Type (winding, excitation):
- 3.3.1.1. Maximum hourly output: kW
- 3.3.1.2. Operating voltage:V
- 3.3.2. Battery
- 3.3.2.1. Number of cells:
- 3.3.2.2. Mass: kg
- 3.3.2.3. Capacity:Ah (Amp/hours)
- 3.3.2.4. Position:

B 1170

- 3.4 Other engines or motors or combinations thereof (particulars regarding the parts of such engines or motors):
- 3.5 CO₂ emissions/fuel consumption ^[a] (manufacturer's declared value)
 - 3.5.1 CO₂ mass emissions:g/km
 - 3.5.2 Fuel consumption (urban conditions): l/100 km
 - 3.5.3 Fuel consumption (extra-urban conditions) l/100 km
 - 3.5.4 Fuel consumption (combined): l/100 km
- 3.6 Temperatures permitted by the manufacturer
 - 3.6.1 Cooling system
 - 3.6.1.1. Liquid cooling
Maximum temperature at outlet: °C
 - 3.6.1.2. Air cooling
 - 3.6.1.2.1. Reference point:
 - 3.6.1.2.2. Maximum temperature at reference point: °C
 - 3.6.2 Maximum outlet temperature of the inlet intercooler °C
 - 3.6.3 Maximum exhaust temperature at the point in the exhaust pipe(s) adjacent to the outer flange(s) of the exhaust manifold: °C
 - 3.6.4 Fuel temperature
 -minimum: °C
 -maximum: °C
 - 3.6.5 Lubricant temperature
 -minimum: °C
 -maximum: °C
- 3.7 Engine-driven equipment
Maximum permissible power absorbed by the engine-driven equipment as specified in and under the operating conditions of Directive 80/1269/EEC, Annex I, Item 5.1.1, at each engine speed as defined in Item 4.1 in Annex III to Directive 88/77/EEC
 - 3.7.1. Idling:kW
 - 3.7.2. Intermediate:kW
 - 3.7.3. Rated:kW

- 3.8 Lubrication system
- 3.8.1 ⁽¹⁾ Description of the system
- 3.8.1.1 Position of lubricant reservoir:
- 3.8.1.2 Feed system (by pump/injection into intake/mixing with fuel, etc.) ⁽¹⁾
- 3.8.2 Lubricating pump
- 3.8.2.1 Make(s):
- 3.8.2.2. Type(s):
- 3.8.3 Mixture with fuel
- 3.8.3.1 Percentage:
- 3.8.4 Oil cooler: yes/no ⁽¹⁾
- 3.8.4.1 Drawing(s): , or
- 3.8.4.1.1 Make(s):
- 3.8.4.1.2. Type(s):
4. **TRANSMISSION** ⁽¹⁾
- 4.1 Drawing of the transmission:
- 4.2 Type (mechanical, hydraulic, electric, etc.):
- 4.2.1 A brief description of the electrical/electronic components (if any):
- 4.3 Moment of inertia of engine flywheel:
- 4.3.1. Additional moment of inertia with no gear engaged
- 4.4 Clutch (type):
- 4.4.1. Maximum torque conversion:
- 4.5. Gearbox
- 4.5.1. Type (manual/automatic/CVT (continuously variable transmission)) ⁽¹⁾
- 4.5.2. Location relative to the engine:
- 4.5.3. Method of control

4.6. Gear ratios

Gear	Internal gearbox ratios (ratios of engine to gearbox output shaft revolutions)	Final drive ratio(s) (ratio of gearbox output shaft to driven wheel revolutions)	Total gear ratios
Maximum for CVT ⁽¹⁾ 1 2 3 Minimum for CVT ⁽¹⁾ Reverse			
⁽¹⁾ Continuously variable transmission.			

4.7. Maximum vehicle speed (in km/h) ^(w)

4.8. Speedometer (in the case of tachograph give approval mark only)

4.8.1 Method of operation and description of drive mechanism:

4.8.2. Instrument constant:

4.8.3 Tolerance of the measuring mechanism (pursuant to Item 2.1.3 of Annex II to Directive 75/443/EEC)

4.8.4 Overall transmission ratio (pursuant to Item 2.1.2 of Annex II to Directive 75/443/EEC) or equivalent data:

4.8.5 Diagram of the speedometer scale or other forms of display:

4.9 Differential lock: yes/no/optional ⁽¹⁾

5. AXLES

5.1. Description of each axle:

5.2. Make:

5.3. Type:

5.4. Position of retractable axle(s):

5.5. Position of loadable axle(s):

6. SUSPENSION

- 6.1. Drawing of the suspension arrangements:
- 6.2. Type and design of the suspension of each axle or group of axles or wheel:
- 6.2.1. Level adjustment: yes/no/optional ⁽¹⁾
- 6.2.2. A brief description of the electrical/electronic components (if any):
- 6.2.3. Air-suspension for driving axle(s): yes/no ⁽¹⁾
- 6.2.3.1. Suspension of driving axle equivalent to air-suspension: yes/no ⁽¹⁾
- 6.2.3.2. Frequency and damping of the oscillation of the sprung mass:
- 6.3. Characteristics of the springing parts of the suspension (design, characteristics of the materials and dimensions):
- 6.4. Stabilisers: yes/no/optional ⁽¹⁾
- 6.5. Shock absorbers: yes/no/optional ⁽¹⁾
- 6.6. Tyres and wheels
- 6.6.1. Tyre/wheel combination(s) (for tyres indicate size designation, minimum load-capacity index, minimum speed category symbol, for wheels indicate rim size(s) and off-set(s))
- 6.6.1.1. Axles
- 6.6.1.1.1. Axle 1:
- 6.6.1.1.2. Axle 2: etc
- 6.6.1.2. Spare wheel, if any:
- 6.6.2. Upper and lower limits of rolling radii
- 6.6.2.1. Axle 1:
- 6.6.2.2. Axle 2: etc
- 6.6.3. Tyre pressure(s) as recommended by the vehicle manufacturer: kPa
- 6.6.4. Chain/tyre/wheel combination on the front and/or rear axle that is suitable for the type of vehicle, as recommended by the manufacturer:
- 6.6.5. Brief description of temporary use spare unit, if any:

7. STEERING

- 7.1. ^a Schematic diagram of steered axle(s) showing steering geometry:
- 7.2. Transmission and control
- 7.2.1. Type of steering transmission (specify for front and rear, if applicable)
- 7.2.2. Linkage to wheels (including other than mechanical means, specify for front and rear, if applicable):
- 7.2.2.1. A brief description of the electrical/electronic components (if any):
- 7.2.3. Method of assistance, if any:
- 7.2.3.1. Method and diagram of operation, make(s) and type(s):
- 7.2.4. Diagram of the steering equipment as a whole, showing the position on the vehicle of the various devices influencing its steering behaviour:
- 7.2.5. Schematic diagram(s) of the steering control(s):
- 7.2.6. Range and method of adjustment, if any, of the steering control:
- 7.3. Maximum steering angle of the wheels
- 7.3.1. To the right: degrees; number of turns of the steering wheel (or equivalent data):
- 7.3.2. To the left: degrees; number of turns of the steering wheel (or equivalent data):

8. BRAKES

The following particulars, including means of identification, where applicable, are to be given:

- 8.1. Type and characteristics of the brakes (as defined in Annex I, Item 1.6 to Directive 71/320/EEC) with a drawing (e.g. drums or discs, wheels braked, connection to braked wheels, make and type of shoe/pad assemblies and/or linings, effective braking areas, radius of drums, shoes or discs, mass of drums, adjustment devices, relevant parts of the axle(s) and suspension):

- 8.2 Operating diagram, description and/or drawing of the following braking systems (as defined in Annex I, Item 1.2 to Directive 71/320/EEC) with, for example, transmission and control (construction, adjustment, lever ratios, accessibility of control and its position, ratchet controls in the case of mechanical transmission, characteristics of the main parts of the linkage, cylinders and control pistons, brake cylinders or equivalent components in the case of electrical braking systems)
- 8.2.1 Service braking system:
- 8.2.2 Secondary braking system:
- 8.2.3. Parking braking system:
- 8.2.4. Any additional braking system:
- 8.2.5 Break-away braking system:
- 8.3. Control and transmission of trailer braking systems in vehicles designed to tow a trailer:
- 8.4. Vehicle is equipped to tow a trailer with electric/pneumatic/hydraulic ⁽¹⁾ service brakes: yes/no ⁽¹⁾
- 8.5. Anti-lock braking system: yes/no/optional ⁽¹⁾
- 8.5.1 For vehicles with anti-lock systems, description of system operation (including any electronic parts), electric block diagram, hydraulic or pneumatic circuit plan:
- 8.6 Calculation and curves according to the Appendix to Item 1.1.4.2 of Annex II to Directive 71/320/EEC (or the Appendix to Annex XI, if applicable):
- 8.7 Description and/or drawing of the energy supply (also to be specified for power-assisted braking systems):
- 8.7.1 In the case of compressed-air braking systems, working pressure p_2 in the pressure reservoir(s):
- 8.7.2 In the case of vacuum braking systems, the initial energy level in the reservoir(s):
- 8.8. Calculation of the braking system: Determination of the ratio between the total braking forces at the circumference of the wheels and the force applied to the braking control:
- 8.9. Brief description of the braking systems (according to Item 1.6 of the Addendum to Appendix 1 of Annex IX to Directive 71/320/EEC):
- 8.10 If claiming exemptions from the Type I and/or Type II tests, state the number of the report in accordance with Appendix 2 of Annex VII to Directive 71/320/EEC:
- 8.11. Particulars of the type(s) of endurance braking system(s):

9. BODYWORK

- 9.1 Type of bodywork
- 9.2 Materials used and methods of construction
- 9.3 Occupant doors, latches and hinges
 - 9.3.1 Door configuration and number of doors:
 - 9.3.1.1 Dimensions, direction and maximum angle of opening:
 - 9.3.2 Drawing of latches and hinges and of their position in the doors:
 - 9.3.3 Technical description of latches and hinges:
 - 9.3.4 Details (including dimensions) of entrances, steps and necessary handles where applicable:
- 9.4 Field of vision
 - 9.4.1 Particulars of the primary reference marks in sufficient detail to enable them to be readily identified and the position of each in relation to the others and to the R-point to be verified:
 - 9.4.2 Drawing(s) or photograph(s) showing the location of component parts within the 180° forward field of vision:
- 9.5 Windscreen and other windows
 - 9.5.1 Windscreen
 - 9.5.1.1 Materials used:
 - 9.5.1.2 Method of mounting:
 - 9.5.1.3 Angle of inclination:
 - 9.5.1.4 Approval number(s):
 - 9.5.2 Other windows
 - 9.5.2.1 Materials used:
 - 9.5.2.2 Approval number(s):
 - 9.5.2.3 A brief description of the electrical/electronic components (if any) of the window lifting mechanism:

- 9.5.3. Opening roof glazing
- 9.5.3.1. Materials used:
- 9.5.3.2. Approval number(s):
- 9.5.4. Other glass panes
- 9.5.4.1. Materials used:
- 9.5.4.2. Approval number(s):
- 9.6. Windscreen wiper(s)
- 9.6.1. Detailed technical description (including photographs or drawings):
- 9.7. Windscreen washer
- 9.7.1. Detailed technical description (including photographs or drawings) or, if approved as separate technical unit, approval number:
- 9.8. Defrosting and demisting
- 9.8.1. Detailed technical description (including photographs or drawings):
- 9.8.2. Maximum electrical consumption:..... kW
- 9.9. Rear-view mirrors (state for each mirror)
- 9.9.1. Make:
- 9.9.2. Approval mark:
- 9.9.3. Variant:
- 9.9.4. Drawing(s) showing the position relative to the vehicle structure:
- 9.9.5. Details of the method of attachment including that part of the vehicle structure to which it is attached:
- 9.9.6. Optional equipment which may affect the rearward field of vision:
- 9.9.7. A brief description of the electronic components (if any) of the adjustment system:

B 1178

9.10	Interior fittings
9.10 ^b	Interior protection for occupants
9.10.1.1	Layout drawing or photographs showing the position of the attached sections or views
9.10.1.2.	Photograph or drawing showing the reference line including the exempted area (Annex I, Item 2.3.1 to Directive 74/60/EEC).
9.10.1.3.	Photographs, drawings and/or an exploded view of the interior fittings, showing the parts in the passenger compartment and the materials used (with the exception of interior rear view mirrors), arrangement of controls, roof and sliding roof, backrest, seats and the rear part of seats (Annex I, Item 3.2 to Directive 74/60/EEC):
9.10.2.	Arrangement and identification of controls, tell-tales and indicators
9.10.2.1	Photographs and/or drawings of the arrangement of symbols and controls, tell-tales and indicators:
9.10.2.2	Photographs and/or drawings of the identification of controls, tell-tales and indicators and of the vehicle parts mentioned in Directive 78/316/EEC where relevant:
9.10.2.3	Summary table The vehicle is equipped with the following controls, indicators and tell-tales pursuant to Annexes II and III to Directive 78/316/EEC:

9.10.3	Seats
9.10.3.1	Number:
9.10.3.2.	Position and arrangement:
9.10.3.2.1.	Seating position(s) designated for use only when the vehicle is stationary:
9.10.3.3.	Mass:
9.10.3.4.	Characteristics: For seats not type-approved as components, description and drawings of: ..
9.10.3.4.1.	the seats and their anchorages:
9.10.3.4.2.	the adjustment system:
9.10.3.4.3.	the displacement and locking systems:
9.10.3.4.4.	the seat belt anchorages (if incorporated in the seat structure):
9.10.3.4.5.	the parts of the vehicle used as anchorages:
9.10.3.5.	Coordinates or drawing of the R-point ^(x)
9.10.3.5.1.	Driver's seat:
9.10.3.5.2.	All other seating positions:
9.10.3.6.	Design torso angle
9.10.3.6.1.	Driver's seat:
9.10.3.6.2.	All other seating positions:
9.10.3.7.	Range of seat adjustment
9.10.3.7.1.	Driver's seat:
9.10.3.7.2.	All other seating positions:
9.10.4.	Head restraints
9.10.4.1.	Type(s) of head restraints: integrated/detachable/separate ⁽¹⁾
9.10.4.2.	Type-approval number(s), if available:

B 1182

- 9.10.4.3 For head restraints not yet approved
- 9.10.4.3.1 A detailed description of the head restraint, specifying in particular the nature of the padding material or materials and, where applicable, the position and specifications of the braces and anchorage pieces for the type of seat for which approval is sought:
- 9.10.4.3.2 In the case of a "separate" head restraint
- 9.10.4.3.2.1 A detailed description of the structural zone to which the head restraint is intended to be fixed:
- 9.10.4.3.2.2 Dimensional drawings of the characteristic parts of the structure and the head restraint:
- 9.10.5 Heating systems for the passenger compartment
- 9.10.5.1 A brief description of the vehicle type with regard to the heating system if the heating system uses the heat of the engine cooling fluid:
- 9.10.5.2 A detailed description of the vehicle type with regard to the heating if the cooling air or the exhaust gases of the engine are used as heat source, including:
- 9.10.5.2.1 layout drawing of the heating system showing its position in the vehicle:
- 9.10.5.2.2 layout drawing of the heat exchanger for heating systems using the exhaust gases for heating, or of the parts where the heat exchange takes place (for heating systems using the engine cooling air for heating):
- 9.10.5.2.3 sectional drawing of the heat exchanger or the parts respectively where the heat exchange takes place indicating the thickness of the wall, used materials and characteristics of the surface:
- 9.10.5.2.4 Specifications shall be given for further important components of the heating system such as, for example, the heater fan, with regard to their method of construction and technical data:
- 9.10.5.3 Maximum electrical consumption:..... kW
- 9.10.6 Components influencing the behaviour of the steering mechanism in the event of an impact
- 9.10.6.1 A detailed description, including photograph(s) and/or drawing(s), of the vehicle type with respect to the structure, the dimensions, the lines and the constituent materials of that part of the vehicle forward of the steering control, including those components designed to contribute to the absorption of energy in the event of an impact against the steering control:
- 9.10.6.2 Photograph(s) and/or drawing(s) of vehicle components other than those described in 9.10.6.1 as identified by the manufacturer in agreement with the technical service, as contributing to the behaviour of the steering mechanism in case of impact:

- 9.10.7 Burning behaviour of materials used in the interior construction of certain categories of motor vehicles
- 9.10.7.1 Material(s) used for the interior lining of the roof
- 9.10.7.1.1 Component type-approval number(s), if available:
- 9.10.7.1.2 For materials not approved
- 9.10.7.1.2.1 Base material(s)/designation: /
- 9.10.7.1.2.2 Composite/single ⁽¹⁾ material, number of layers ⁽¹⁾:
- 9.10.7.1.2.3 Type of coating ⁽¹⁾:
- 9.10.7.1.2.4 Maximum/minimum thickness: / mm
- 9.10.7.2 Material(s) used for the rear and side walls
- 9.10.7.2.1 Component type-approval number(s), if available:
- 9.10.7.2.2 For materials not approved
- 9.10.7.2.2.1 Base material(s)/designation: /
- 9.10.7.2.2.2 Composite/single ⁽¹⁾ material, number of layers ⁽¹⁾:
- 9.10.7.2.2.3 Type of coating ⁽¹⁾:
- 9.10.7.2.2.4 Maximum/minimum thickness: / mm
- 9.10.7.3 Material(s) used for the floor
- 9.10.7.3.1 Component type-approval number(s), if available:
- 9.10.7.3.2 For materials not approved
- 9.10.7.3.2.1 Base material(s)/designation: /
- 9.10.7.3.2.2 Composite/single ⁽¹⁾ material, number of layers ⁽¹⁾:
- 9.10.7.3.2.3 Type of coating ⁽¹⁾:
- 9.10.7.3.2.4 Maximum/minimum thickness: / mm

B 1184

9 10 7 4 Material(s) used for the upholstery of the seats

9 10 7 4 1 Component type-approval number(s), if available:

9 10 7 4 2 For materials not approved

9 10 7 4 2.1 Base material(s)/Designation: /

9 10 7 4 2.2 Composite/Single ⁽¹⁾ material, number of layers ⁽¹⁾:

9 10 7 4 2.3 Type of coating ⁽¹⁾:

9 10 7 4 2.4 Maximum/Minimum thickness: .. / ... mm

9 10 7 5 Material(s) used for the heating and ventilation pipes:

9 10 7 5 1 Component type-approval number(s), if available:

9 10 7 5 2 For materials not approved

9 10 7 5 2.1 Base material(s)/Designation: /

9 10 7 5 2.2 Composite/Single ⁽¹⁾ material, number of layers ⁽¹⁾:

9 10 7 5 2.3 Type of coating ⁽¹⁾:

9 10 7 5 2.4 Maximum/Minimum thickness: .. / ... mm

9 10 7 6 Material(s) used for luggage racks

9 10 7 6 1 Component type-approval number(s), if available:

9 10 7 6 2 For materials not approved

9 10 7 6 2.1 Base material(s)/Designation: /

9 10 7 6 2.2 Composite/Single ⁽¹⁾ material, number of layers ⁽¹⁾:

9 10 7 6 2.3 Type of coating ⁽¹⁾:

9 10 7 6 2.4 Maximum/Minimum thickness: .. / ... mm

9 10 7 7 Material(s) used for other purposes

9 10 7 7.1 Intended purposes:

9 10 7 7.2 Component type-approval number(s), if available:

- 9.10.7.7.3. For materials not approved
- 9.10.7.7.3.1 Base material(s)/Designation:
- 9.10.7.7.3.2 Composite/Single ⁽¹⁾ material, number of layers ⁽¹⁾
- 9.10.7.7.3.3 Type of coating ⁽¹⁾
- 9.10.7.7.3.4 Maximum/Minimum thickness:/.....mm
- 9.10.7.8 Components approved as complete devices (seats, separation walls, luggage racks, etc.)
- 9.10.7.8.1 Component type-approval number(s):
- 9.10.7.8.2 For the complete device: seat, separation wall, luggage racks, etc. ⁽¹⁾
- 9.11 External projections
- 9.11.1 General arrangement (drawing or photographs) indicating the position of the attached sections and views:
- 9.11.2 Drawings and/or photographs, for example, and where relevant, of the door and window pillars, air-intake grilles, radiator grille, windscreen wipers, rain gutter channels, handles, slide rails, flaps, door hinges and locks, hooks, eyes, decorative trim, badges, emblems and recesses and any other external projections and parts of the exterior surface which can be regarded as critical (e.g. lighting equipment). If the parts listed in the previous sentence are not critical, for documentation purposes they may be replaced by photographs, accompanied if necessary by dimensional details and/or text
- 9.11.3 Drawings of parts of the external surface in accordance with Annex I, Item 6.9.1 to Directive 74/483/EEC:
- 9.11.4 Drawing of bumpers:
- 9.11.5 Drawing of the floor line:

9.12 Safety belts and/or other restraint systems

9.12.1. Number and position of safety belts and restraint systems and seats on which they can be used:

(L = left-hand side, R = right-hand side, C = centre)

	Complete EC type-approval mark	Variant, if applicable	Belt adjustment device for height (indicate yes/no/optional)
First row of seats	L		
	C		
	R		
Second row of seats ⁽¹⁾	L		
	C		
	R		
⁽¹⁾ The table may be extended as necessary for vehicles with more than two rows of seats or if there are more than three seats across the width of the vehicle			

9.12.2. Nature and position of supplementary restraint systems (indicate yes/no/optional):

(L = left-hand side, R = right-hand side, C = centre)

	Front airbag	Side airbag	Belt preloading device
First row of seats	L		
	C		
	R		
Second row of seats ⁽¹⁾	L		
	C		
	R		
⁽¹⁾ The table may be extended as necessary for vehicles with more than two rows of seats or if there are more than three seats across the width of the vehicle.			

9.12.3. Number and position of safety belt anchorages and proof of compliance with Directive 76/115/EEC, (i.e. type-approval number or test report):

9.12.4. A brief description of the electrical/electronic components (if any):

9 13 Safety belt anchorages

9 13 1 Photographs and/or drawings of the bodywork showing the position and dimensions of the actual and the effective anchorages including the R-points:

9 13 2 Drawings of the belt anchorages and parts of the vehicle structure where they are attached (with the material indication)

9 13 3 Designation of the types ⁽¹⁾ of safety belt authorised for fitting to the anchorages with which the vehicle is equipped:

				Anchorage location	
				Vehicle structure	Seat structure
First row of seats					
Right-hand seat	lower anchorages	outboard			
	upper anchorage	inboard			
Centre seat	lower anchorages	right			
	upper anchorage	left			
Left hand seat	lower anchorages	outboard			
	upper anchorage	inboard			
Second row of seats ⁽¹⁾					
Right-hand seat	lower anchorages	outboard			
	upper anchorage	inboard			
Centre seat	lower anchorages	right			
	upper anchorage	left			
Left hand seat	lower anchorages	outboard			
	upper anchorage	inboard			
⁽¹⁾ The table may be extended as necessary for vehicles with more than two rows of seats or if there are more than three seats across the width of the vehicle					

9 13 4 Description of a particular type of safety belt where an anchorage is located in the seat backrest or incorporates an energy dissipating device:

⁽¹⁾ For symbols and marks to be used, see Annex III, Items 1 1.3 and 1 1.4 to Directive 77/541/EEC. In the case of "S" type belts, specify the nature of the type(s).

B 1188

- 9.14 Space for mounting rear registration plates (give range where appropriate, drawings may be used where applicable)
- 9.14.1 Height above road surface, upper edge:
- 9.14.2 Height above road surface, lower edge:
- 9.14.3 Distance of the centre line from the longitudinal median plane of the vehicle:
- 9.14.4 Distance from the left vehicle edge:
- 9.14.5 Dimensions (length x width):
- 9.14.6 Inclination of the plane to the vertical:
- 9.14.7 Angle of visibility in the horizontal plane:
- 9.15 Rear underrun protection
- 9.15.0 Presence: yes/no/incomplete ⁽¹⁾
- 9.15.1 Drawing of the vehicle parts relevant to the rear underrun protection, i.e. drawing of the vehicle and/or chassis with position and mounting of the widest rear axle, drawing of the mounting and/or fitting of the rear underrun protection. If the underrun protection is not a special device, the drawing must clearly show that the required dimensions are met:
- 9.15.2 In case of a special device, full description and/or drawing of the rear underrun protection (including mountings and fittings), or, if approved as separate technical unit, type-approval number:
- 9.16 Wheel guards
- 9.16.1 Brief description of the vehicle with regard to its wheel guards:
- 9.16.2 Detailed drawings of the wheel guards and their position on the vehicle showing the dimensions specified in Figure 1 of Annex I to Directive 78/549/EEC and taking account of the extremes of tyre/wheel combinations:
- 9.17 Statutory plates
- 9.17.1 Photographs and/or drawings of the locations of the statutory plates and inscriptions and of the chassis number:
- 9.17.2 Photographs and/or drawings of the official part of the plates and inscriptions (completed example with dimensions):
- 9.17.3 Photographs and/or drawings of the chassis number (completed example with dimensions):

9 17 4	Manufacturer's declaration of compliance with the requirement of Item 3 of Annex II to Directive 76/114/EEC
9 17 4 1	The meaning of characters in the second section and, if applicable, in the third section used to comply with the requirements of Item 3.1.1.2 shall be explained:
9 17 4 2	If characters in the second section are used to comply with the requirements of Item 3.1.1.3 these characters shall be indicated:
9 18	Suppression of radio interference
9 18 1	Description and drawings/photographs of the shapes and constituent materials of the part of the body forming the engine compartment and the part of the passenger compartment nearest to it:
9 18 2	Drawings or photographs of the position of metal components housed in the engine compartment (e.g. heating appliances, spare wheel, air filter, steering mechanism, etc.):
9 18 3	Table and drawing of radio-interference control equipment:
9 18 4	Particulars of the nominal value of the direct current resistance, and, in the case of resistive ignition cables, of their nominal resistance per metre:
9 19	Lateral protection
9 19 0	Presence: yes/no/incomplete ⁽¹⁾
9 19 1	Drawing of the vehicle parts relevant to the lateral protection, i.e. drawing of the vehicle and/or chassis with position and mounting of the axle(s), drawing of the mountings and/or the fittings of lateral protection device(s). If the lateral protection is achieved without lateral protection device(s) the drawing must clearly show that the required dimensions are met:
9 19 2	In the case of lateral protection device(s), full description and/or drawing of such device(s) (including mountings and fittings) or its/their component type-approval number(s):
9 20	Spray-suppression system
9 20 0	Presence: yes/no/incomplete ⁽¹⁾
9 20 1	Brief description of the vehicle with regard to its spray-suppression system and the constituent components:
9 20 2	Detailed drawings of the spray-suppression system and its position on the vehicle showing the dimensions specified in Figures 1 to 7 of Annex III to Directive 91/226/EEC and taking account of the extremes of tyre/wheel combinations:
9 20 3	Approval number(s) of spray-suppression device(s), if available:

B 1190

9.21 Side-impact resistance

9.21.1 A detailed description including photographs and/or drawings, of the vehicle with respect to the structure, the dimensions, the design and the constituent materials, the side walls of the passenger compartment (exterior and interior) including specific details of the protection system, where applicable.

9.22 Front underrun protection

9.22.1 Drawing of the vehicle parts relevant to the front underrun protection, i.e. drawing of the vehicle and/or chassis with position and mounting of the widest front axle, drawing of the mounting and/or fitting of the front underrun protection. If the underrun protection is no special device, the drawing must clearly show that the required dimensions are met.

9.22.2 In the case of special device, full description and/or drawing of the front underrun protection (including mountings and fittings), or, if approved as a separate technical unit, type-approval number:

10. LIGHTING AND LIGHT SIGNALLING DEVICES

10.1 Table of all devices: number, make, model, type-approval mark, maximum intensity of main-beam head lamps, colour, tell-tale

10.2 Drawing of the position of lighting and light signalling devices:

10.3 For every lamp and reflector specified in Directive 76/756/EEC supply the following information (in writing and/or by diagram)

10.3.1 Drawing showing the extent of the illuminating surface

10.3.2 Method used for the definition of the apparent surface (Paragraph 2.10 of the documents referred to in Annex II to Directive 76/756/EEC, Item 1):

10.3.3 Axis of reference and centre of reference.

10.3.4 Method of operation of concealable lamps.

10.3.5 Any specific mounting and wiring provisions:

10.4 Dipped beam lamps: normal orientation as per Paragraph 6.2.6.1. of the documents referred to in Annex II to Directive 76/756/EEC, Item 1

10.4.1 Value of initial adjustment:

10.4.2 Location of indication:

10.4.3 Description/drawing⁽¹⁾ and type of headlamp levelling device (e.g. automatic, stepwise manually adjustable, continuously manually adjustable)

} applicable only for vehicles with headlamp levelling device

10.4.4 Control device:

10.4.5 Reference marks.

10.4.6 Marks assigned for loading conditions:

10.5 A brief description of electrical/electronic components other than lamps (if any).

11. CONNECTIONS BETWEEN TOWING VEHICLES AND TRAILERS AND SEMI-TRAILERS

- 11.1 Class and type of the coupling device(s) fitted or to be fitted:
- 11.2 Characteristics D, U, S and V of the coupling device(s) fitted or minimal characteristics D, U, S and V of the coupling device(s) to be fitted:daN
- 11.3 Instructions for attachment of the coupling type to the vehicle and photographs or drawings of the fixing points at the vehicle as stated by the manufacturer; additional information, if the use of the coupling type is restricted to certain variants or versions of the vehicle type:
- 11.4 Information of the fitting of special towing brackets or mounting plates:
- 11.5 Type-approval number(s):

12. MISCELLANEOUS

- 12.1 Audible warning device(s)
- 12.1.1 Location, method of affixing, placement and orientation of the device(s), with dimensions
.....
- 12.1.2 Number of device(s):
- 12.1.3 Type-approval number(s):
- 12.1.4 Electrical/pneumatic ⁽¹⁾ circuit diagram:
- 12.1.5 Rated voltage or pressure:
- 12.1.6 Drawing of the mounting device:
- 12.2 Devices to prevent unauthorised use of the vehicle
- 12.2.1 Protective device
- 12.2.1.1 A detailed description of the vehicle type with regard to the arrangement and design of the control or of the unit on which the protective device acts:
- 12.2.1.2 Drawings of the protective device and of its mounting on the vehicle:
- 12.2.1.3 A technical description of the device:
- 12.2.1.4 Details of the lock combinations used:

B 1192

- 12.2.1.5 Vehicle immobiliser
- 12.2.1.5.1 Type approval number, if available:
- 12.2.1.5.2 For immobilisers not yet approved
- 12.2.1.5.2.1 A detailed technical description of the vehicle immobiliser and of the measures taken against inadvertent activation:
- 12.2.1.5.2.2 The system(s) on which the vehicle immobiliser acts:
- 12.2.1.5.2.3 Number of effective interchangeable codes, if applicable:
- 12.2.2 Alarm system, if any
- 12.2.2.1 Type-approval number, if available
- 12.2.2.2 For alarm systems not yet approved
- 12.2.2.2.1 A detailed description of the alarm system and of the vehicle parts related to the alarm system installed:
- 12.2.2.2.2 A list of the main components comprising the alarm system:
- 12.2.3 A brief description of the electrical/electronic components (if any):
- 12.3 Towing device(s)
- 12.3.1 Front: Hook/eye/other ⁽¹⁾
- 12.3.2 Rear: Hook/eye/other/none ⁽¹⁾
- 12.3.3 Drawing or photograph of the chassis/area of the vehicle body showing the position, construction and mounting of the towing device(s):
- 12.4 Details of any non-engine related devices designed to influence fuel consumption (if not covered by other items):
- 12.5 Details of any non-engine related devices designed to reduce noise (if not covered by other items):
- 12.6 Speed limiters
- 12.6.1 Manufacturer(s):
- 12.6.2 Type(s):
- 12.6.3 Approval number(s), if available:
- 12.6.4 Speed or range of speeds at which the speed limitation may be set: km/h

13. SPECIAL PROVISIONS FOR BUSES AND COACHES

- 13.1 Class of bus or coach
- 13.2 Number of standing places:
- 13.3 Number of passenger and crew seats:
- 13.3.1 Crew seat yes/no ⁽¹⁾
- 13.4 Number of service doors:
- 13.5 Number of emergency exits (doors, windows, escape hatches):
- 13.6 Volume of luggage compartment: m³
- 13.7 Area for luggage transportation on the roof: m²
- 13.8 Technical devices facilitating the access to buses and coaches (e.g. ramp, lifting platform, kneeling system), if fitted

14. SPECIAL PROVISIONS FOR VEHICLES INTENDED FOR THE TRANSPORT OF DANGEROUS GOODS

- 14.1 Electrical equipment according to Directive 94/55/EC
- 14.1.1 Protection against overheating of conductors:
- 14.1.2 Type of circuit breaker
- 14.1.3 Type and operation of battery master switch:
- 14.1.4 Description and location of safety barrier for tachograph:
- 14.1.5 Description of permanently energised installations Indicate the EN standard applied:
- 14.1.6 Construction and protection of electrical installation situated to the rear of the driver's compartment:
- 14.2 Prevention of fire risk:
- 14.2.1 Type of not readily flammable material in the driver's compartment:
- 14.2.2 Type of heat shield behind the driver's compartment (if applicable):
- 14.2.3 Position and heat protection of engine:
- 14.2.4 Position and heat protection of the exhaust system:
- 14.2.5 Type and design of the endurance braking systems' heat protection:
- 14.2.6 Type, design and position of combustion heaters:

- 14.3 Special requirements for bodywork, if any, according to Directive 94/55/EC.
- 14.3.1 Description of measures to comply with the requirements for Type EX/II and Type EX/III vehicles.
- 14.3.2 In the case of Type EX/III vehicles, resistance against heat from the outside.

Footnotes

- ¹⁾ Delete where not applicable (there are cases where nothing need be deleted when more than one entry is applicable).
- ²⁾ Specify the tolerance.
- ³⁾ If a part has been type-approved that part need not be described if reference is made to such approval. Similarly, a part need not be described if its construction is clearly apparent from the attached diagrams or drawings.
- ⁴⁾ For each item for which drawings or photographs must be attached, give numbers of the corresponding attached documents.
- ⁵⁾ If the means of identification of type contains characters not relevant to describe the vehicle, component or separate technical unit types covered by this information document, such characters shall be represented in the documentation by the symbol "X" (e.g. ABC"X123"X).
- ⁶⁾ Classified according to the definitions listed in Annex II, Section A.
- ⁷⁾ If possible, designation according to Euroform, otherwise give:
description of the material,
yield point,
ultimate tensile stress,
elongation (in %),
Brinell hardness.
- ⁸⁾ Where there is one version with a normal cab and another with a sleeper cab, both sets of masses and dimensions are to be stated.
- ⁹⁾ ISO Standard 612 — 1978, term No 6.4.
- ¹⁰⁾ ISO Standard 612 — 1978, term No 6.19.2.
- ¹¹⁾ ISO Standard 612 — 1978, term No 6.20.
- ¹²⁾ ISO Standard 612 — 1978, term No 6.5.
- ¹³⁾ ISO Standard 612 — 1978, term No 6.1 and for vehicles other than those of Category M, Directive 97/27/EC, Annex 1, Section 2.4.1.
- ¹⁴⁾ ISO Standard 612 — 1978, term No 6.2 and for vehicles other than those Category M, Directive 97/27/EC, Annex 1, Section 2.4.2.
- ¹⁵⁾ ISO Standard 612 — 1978, term No 6.3 and for vehicles other than those of Category M, Directive 97/27/EC, Annex 1, Section 2.4.3.
- ¹⁶⁾ ISO Standard 612 — 1978, term No 6.6.
- ¹⁷⁾ ISO Standard 612 — 1978, term No 6.7.
- ¹⁸⁾ ISO Standard 612 — 1978, term No 6.10.
- ¹⁹⁾ ISO Standard 612 — 1978, term No 6.11.
- ²⁰⁾ ISO Standard 612 — 1978, term No 6.9.
- ²¹⁾ ISO Standard 612 — 1978, term No 6.18.1.
- ²²⁾ The mass of the driver is assessed at 75 kg (subdivided into 68 kg occupant mass and 7 kg luggage mass according to ISO Standard 2416 — 1992), the fuel tank is filled to 90% and the other liquid containing systems (except those for used water) to 100% of the capacity specified by the manufacturer.
- ²³⁾ "Coupling overhang" is the horizontal distance between the coupling for centre-axle trailers and the centreline of the rear axle(s).
- ²⁴⁾ In the case of non-conventional engines and systems, particulars equivalent to those referred to here shall be supplied by the manufacturer.
- ²⁵⁾ This figure must be rounded off to the nearest tenth of a millimetre.
- ²⁶⁾ This value must be calculated $\pi = 3.1416$ and rounded off to the nearest cm^3 .
- ²⁷⁾ Determined in accordance with the requirements of Directive 80/1269/EEC.
- ²⁸⁾ Determined in accordance with the requirements of Directive 80/1268/EEC.
- ²⁹⁾ The specified particulars are to be given for any proposed variants.
- ³⁰⁾ A 5% tolerance is permitted.
- ³¹⁾ "R-point" or "seating reference point" means a design point defined by the vehicle manufacturer for each seating position and established with respect to the three-dimensional reference system as specified in Annex III to Directive 77/649/EEC.
- ³²⁾ For trailers or semi-trailers, and for vehicles coupled with a trailer or a semi-trailer which exert a significant vertical load on the coupling device or the fifth wheel, this load, divided by standard acceleration of gravity, is included in the maximum technically permissible mass.
- ³³⁾ "Forward control" means a configuration in which more than half of the engine length is rearward of the foremost point of the windshield base and the steering wheel hub in the forward quarter of the vehicle length.

Schedule II

Based on Annex II of the Directive

DEFINITION OF VEHICLE CATEGORIES AND VEHICLE TYPES

A. VEHICLE CATEGORIES ARE DEFINED ACCORDING TO THE FOLLOWING INTERNATIONAL CLASSIFICATION:

(Where reference is made to "maximum mass" in the following definitions, this means technically permissible maximum laden mass as specified in Item 2.8 of Annex I.)

1. Category M₁: Motor vehicles with at least four wheels used for the carriage of passengers.
 Category M₁: Vehicles used for the carriage of passengers and comprising no more than eight seats in addition to the driver's seat.
 Category M₂: Vehicles used for the carriage of passengers, comprising more than eight seats in addition to the driver's seat, and having a maximum mass not exceeding 5 tonnes.
 Category M₃: Vehicles used for the carriage of passengers, comprising more than eight seats in addition to the driver's seat, and having a maximum mass exceeding 5 tonnes.
 The types of bodywork and codifications pertinent to vehicles of Category M₁ are defined in Part C of this Annex to be used for the purpose specified in that Part.
2. Category N₁: Motor vehicles with at least four wheels used for the carriage of goods.
 Category N₁: Vehicles used for the carriage of goods and having a maximum mass not exceeding 3.5 tonnes.
 Category N₂: Vehicles used for the carriage of goods and having a maximum mass exceeding 3.5 tonnes but not exceeding 12 tonnes.
 Category N₃: Vehicles used for the carriage of goods and having a maximum mass exceeding 12 tonnes.

In the case of a towing vehicle designed to be coupled to a semi-trailer or centre-axle trailer, the mass to be considered for classifying the vehicle is the mass of the tractor vehicle in running order, increased by the mass corresponding to the maximum static vertical load transferred to the tractor vehicle by the semi-trailer or centre-axle trailer and, where applicable, by the maximum mass of the tractor vehicle's own load.

- 3 Category O Trailers (including semi-trailers).
- * Category O₁ Trailers with a maximum mass not exceeding 0,75 tonnes.
- Category O₂ Trailers with a maximum mass exceeding 0,75 tonnes but not exceeding 3,5 tonnes.
- Category O₃ Trailers with a maximum mass exceeding 3,5 tonnes but not exceeding 10 tonnes.
- Category O₄ Trailers with a maximum mass exceeding 10 tonnes.

In the case of a semi-trailer or centre-axle trailer, the maximum mass to be considered for classifying the trailer corresponds to the static vertical load transmitted to the ground by the axle or axles of the semi-trailer or centre-axle trailer when coupled to the towing vehicle and carrying its maximum load.

4 OFF-ROAD VEHICLES (SYMBOL G).

- 4.1. Vehicles in Category N₁ with a maximum mass not exceeding two tonnes and motor vehicles in Category M₁ are considered to be off-road vehicles if they have:

- at least one front axle and at least one rear axle designed to be driven simultaneously including vehicles where the drive to one axle can be disengaged,
- at least one differential locking mechanism or at least one mechanism having a similar effect and if they can climb a 30% gradient calculated for a solo vehicle.

In addition, they must satisfy at least five of the following six requirements:

- the approach angle must be at least 25 degrees
- the departure angle must be at least 20 degrees,
- the ramp angle must be at least 20 degrees,
- the ground clearance under the front axle must be at least 180 mm
- the ground clearance under the rear axle must be at least 180 mm,
- the ground clearance between the axles must be at least 200 mm.

- 4.2. Vehicles in Category N₁ with a maximum mass exceeding two tonnes or in Category N₂, M₂ or M₃ with a maximum mass not exceeding 12 tonnes are considered to be off-road vehicles either if all their wheels are designed to be driven simultaneously, including vehicles where the drive to one axle can be disengaged, or if the following three requirements are satisfied

- at least one front axle and at least one rear axle are designed to be driven simultaneously, including vehicles where the drive to one axle can be disengaged,
- there is at least one differential locking mechanism or at least one mechanism having a similar effect,
- they can climb a 25% gradient calculated for a solo vehicle.

- 4.3. Vehicles in Category M₃ with a maximum mass exceeding 12 tonnes or in Category N₃ are to be considered to be off-road vehicles either if the wheels are designed to be driven simultaneously, including vehicles where the drive to one axle can be disengaged, or if the following requirements are satisfied:

- at least half the wheels are driven,
- there is at least one differential locking mechanism or at least one mechanism having a similar effect,
- they can climb a 25% gradient calculated for a solo vehicle,
- at least four of the following six requirements are satisfied:
 - the approach angle must be at least 25 degrees,
 - the departure angle must be at least 25 degrees,
 - the ramp angle must be at least 25 degrees,
 - the ground clearance under the front axle must be at least 250 mm,
 - the ground clearance between the axles must be at least 300 mm
 - the ground clearance under the rear axle must be at least 250 mm.


4.4. Load and Checking Conditions.

- 4.4.1. Vehicles in Category N₁ with a maximum mass not exceeding two tonnes and vehicles in Category M₁ must be in running order, namely with coolant fluid, lubricants, fuel, tools, spare-wheel and driver (see footnote ^(e) in Annex I).
- 4.4.2. Motor vehicles other than those referred to in 4.4.1 must be loaded to the technically permissible maximum mass stated by the manufacturer.
- 4.4.3. The ability to climb the required gradients (25% and 30%) is verified by simple calculation. In exceptional cases, however, the technical services may ask for a vehicle of the type concerned to be submitted to it for an actual test.
- 4.4.4. When measuring approach and departure angles and ramp angles, no account is taken of underrun protective devices.

4.5. Definitions and Sketches of Ground Clearance.


4.5.1 'Ground clearance between the axles' means the shortest distance between the ground plane and the lowest fixed point of the vehicle.

Multi-axled bogies are considered to be a single axle.

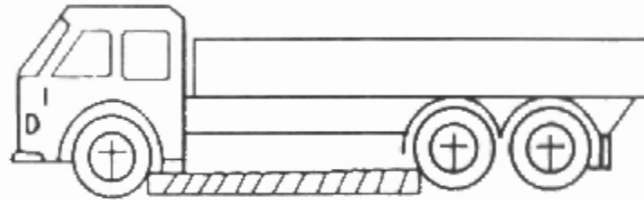

4.5.2 'Ground clearance beneath one axle' means the distance beneath the highest point of the arc of a circle passing through the centre of the tyre footprint of the wheels on one axle (the inner wheels in the case of twin tyres) and touching the lowest fixed point of the vehicle between the wheels.

No rigid part of the vehicle may project into the shaded arc of the diagram. Where appropriate, the ground clearance of several axles is indicated in accordance with their arrangement, for example 280/250/250.

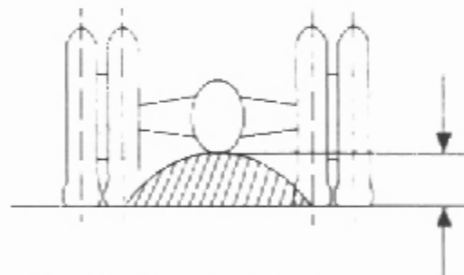

(For definitions of approach angle, departure angle, ramp angle, see Annex I, footnotes ^(nab), ^(nbi) and ^(nci).)

4.6. Combined Designation

Symbol "G" shall be combined with either symbol "M" or "N". For example, a vehicle of Category N, which is suited for off-road use shall be designated as N₁G.

5. SPECIAL PURPOSE VEHICLE:

A vehicle of Category M, N or O for conveying passengers or goods and for performing a special function for which special body arrangements and/or equipment are necessary.

5.1. Motor Caravan:

"Motor caravan means a special purpose M. Category vehicle constructed to include living accommodation which contains at least the following equipment

- seats and table,
- sleeping accommodation which may be converted from the seats,
- cooking facilities, and
- storage facilities.

This equipment shall be rigidly fixed to the living compartment, however, the table may be designed to be easily removable

5.2. Armoured Vehicles:

Vehicles intended for the protection of conveyed passengers and/or goods and complying with armour plating anti-bullet requirements

5.3. Ambulances:

Motor vehicles of Category M intended for the transport of sick or injured people and having special equipment for such purpose.

5.4. Hearses:

Motor vehicles intended for the transport of deceased people and having special equipment for such purpose.

B. DEFINITION OF VEHICLE TYPE

1. For the purposes of Category M₁:

A 'type' shall consist of vehicles which do not differ in at least the following essential respects:

- the manufacturer,
- the manufacturer's type designation,
- essential aspects of construction and design,
 - chassis/floor pan (obvious and fundamental differences)
 - power plant (internal combustion/electric/hybrid).

'Variant' of a type means vehicles within a type which do not differ in at least the following essential respects:

- body style (e.g. saloon, hatchback, coupé, convertible, station-wagon, multi-purpose vehicle),

B 1200

- power plant .
 - * - working principle (as in item 3.2.1.1 of Annex III),
 - number and arrangement of cylinders,
 - power differences of more than 30% (the highest is more than 1.3 times the lowest),
 - capacity differences of more than 20% (the highest is more than 1.2 times the lowest).
- powered axles (number, position, interconnection),
- steered axles (number and position).

'Version' of a variant means vehicles which consist of a combination of items shown in the information package subject to the requirements in Annex VIII.

Multiple entries of the following parameters may not be combined within one version .

- technically permissible maximum laden mass,
- engine capacity,
- maximum net power,
- maximum number of seating positions as defined in Annex II.C.

Full identification of the vehicle just from the designations of type, variant and version must be consistent with a single accurate definition of all technical characteristics required for the vehicle to be put into service.

C. DEFINITION OF TYPE OF BODY WORK (only for completed vehicles)

The type of bodywork in Annex I, Annex III, Part I, item 9.1 and in Annex IX, item 37 shall be indicated by the following codification :

1. PASSENGER CARS (M₁)

AA Saloon

MSA ISO 3833:2002, Term No.3.1.1.1, but including also vehicles with more than four side windows.

AB Hatchback

Saloon (AA) with a hatch at the rear end of the vehicle.

AC Station Wagon

MSA ISO 3833:2002, Term No. (estate car) 3.1.1.4

AD Coupe

MSA ISO 3833:2002, Term No. 3.1.1.5

AE Convertible

MSA ISO 3833:2002, Term No. 3.1.1.6

AF Multi-purpose vehicle

Motor vehicle other than those mentioned in AA to AC intended for carrying passengers and their luggage or goods, in a single compartment.

However, if such a vehicle meets both of the following conditions:

1. the number of seating positions, excluding the driver, is not more than six.
- 1.1. a "seating position" shall be regarded as existing if the vehicle is provided with "accessible" seat anchorages.
- 1.1.1. "accessible" shall mean those anchorages which can be used. In order to prevent anchorages being "accessible", the manufacturer shall physically obstruct their use, for example by welding over cover plates or by fitting similar fixtures which cannot be removed by use of normally available tools ;

and

2. $P - (M + N \times 68) > N \times 68$

Where :

P = technically permissible maximum laden mass in kg

M = mass in running order in kg

N = number of seating positions excluding the driver

this vehicle is not considered to be a vehicle of Category M₁.

2

SPECIAL PURPOSE VEHICLES (M₁)

SA Motor caravans	See Annex II.A, Item 5.1.
SB Armoured vehicles	See Annex II.A, Item 5.2.
SC Ambulances	See Annex II.A, Item 5.3.
SD Hearses	See Annex II.A, Item 5.4.

Schedule III

Based on Annex III of the Directive

INFORMATION DOCUMENT FOR THE PURPOSES OF VEHICLE TYPE-APPROVAL

(for footnotes refer to Annex I)

PART I

The following information, if applicable, must be supplied in triplicate and include a list of contents. Any drawings must be supplied in appropriate scale and in sufficient detail on size A4 or on a folder of A4 format. Photographs, if any, must show sufficient detail.

If the systems, components or separate technical units have electronic controls, information concerning their performance must be supplied.

0. GENERAL

- 0.1 Make (trade name of manufacturer):
- 0.2 Type:
- 0.2.1 Commercial name(s) (if available):
- 0.3 Means of identification of type, if marked on the vehicle ^(b):
- 0.3.1 Location of that marking:
- 0.4 Category of vehicle ^(a):
- 0.5 Name and address of manufacturer:
- 0.6 Address(es) of assembly plant(s):

1. GENERAL CONSTRUCTION CHARACTERISTICS OF THE VEHICLE

- 1.1 Photographs and/or drawings of a representative vehicle:
- 1.3 Number of axles and wheels:
- 1.3.2 Number and position of steered axles:
- 1.3.3 Powered axles (number, position, interconnection):
- 1.4 Chassis (if any) (overall drawing):
- 1.6 Position and arrangement of the engine:
- 1.8 Hand of drive: left/right ⁽¹⁾
- 1.8.1 Vehicle is equipped to be driven in right/left ⁽¹⁾ hand traffic

2.	MASSES AND DIMENSIONS ^(a) (in kg and mm) (Refer to drawing where applicable)
2.1	Wheelbase(s) (fully loaded) ^(b)
2.3.1	Track of each steered axle ^(b)
2.3.2	Track of all other axles ^(b)
2.4	Range of vehicle dimensions (overall)
2.4.2	For chassis with bodywork
2.4.2.1	Length ^(b)
2.4.2.2	Width ^(b)
2.4.2.3	Height (in running order) ^(b) (for suspensions adjustable for height, indicate normal running position):
2.6	Mass of the vehicle with bodywork, and with coupling device in the case of a towing vehicle of category other than M ₁ , in running order, or mass of the chassis with cab if the manufacturer does not fit the bodywork and/or coupling device (including coolant, oils, fuel, 100% other liquids except used waters, tools, spare wheel and driver and, for buses and coaches, the mass of the crew member (75 kg) if there is a crew seat in the vehicle) ^(a) (maximum and minimum) for each variant:
2.6.1	Distribution of this mass among the axles and, in the case of a semi-trailer or centre-axle trailer, load on the coupling point (maximum and minimum for each variant):
2.7	Minimum mass of the completed vehicle as stated by the manufacturer, in the case of an incomplete vehicle.
2.8	Technically permissible maximum laden mass stated by the manufacturer ^(b) (maximum and minimum for each variant):
2.8.1	Distribution of this mass among the axles and, in the case of a semi-trailer or centre-axle trailer, load on the coupling point (maximum and minimum for each variant):
2.9	Technically permissible maximum load/mass on each axle:
2.11	Technically permissible maximum towable mass of the motor vehicle in case of
2.11.1	Drawbar trailer
2.11.3	Centre-axle trailer
2.11.4	Technically permissible maximum mass of the combination:
2.11.5	Vehicle is/is not ^(c) suitable for towing loads (Item 1.2 of Annex II to Directive 77/389/EEC)
2.11.6	Maximum mass of unbraked trailer:
2.12	Technically permissible maximum static vertical load/mass on the vehicle's coupling point:
2.12.1	Of the motor vehicle:

B 1204

3. POWER PLANT ^(a)

- 3.1. Manufacturer:
- 3.1.1. Manufacturer's engine code (as marked on the engine, or other means of identification):
- 3.2. internal combustion engine
 - 3.2.1.1. Working principle: positive ignition/compression ignition, four stroke/two stroke ⁽¹⁾
 - 3.2.1.2. Number and arrangement of cylinders:
 - 3.2.1.3. Engine capacity ^(*):cm³
 - 3.2.1.8. Maximum net power ⁽⁶⁾:kW atmin⁻¹ (manufacturer's declared value)
 - 3.2.2. Fuel: diesel oil/petrol/LPG/any other ⁽¹⁾
 - 3.2.2.1. RON, leaded:
 - 3.2.2.2. RON, unleaded:
 - 3.2.4. Fuel feed
 - 3.2.4.1. By carburettor(s): yes/no ⁽¹⁾
 - 3.2.4.2. By fuel injection (compression ignition only): yes/no ⁽¹⁾
 - 3.2.4.2.2. Working principle: direct injection/pre-chamber/swirl chamber ⁽¹⁾
 - 3.2.4.3. By fuel injection (positive ignition only): yes/no ⁽¹⁾
 - 3.2.7. Cooling system: (liquid/air) ⁽¹⁾
 - 3.2.8. Intake system
 - 3.2.8.1. Pressure charger: yes/no ⁽¹⁾
 - 3.2.12. Measures taken against air pollution
 - 3.2.12.2. Additional anti-pollution devices (if any, and if not covered by another heading)
 - 3.2.12.2.1. Catalytic converter: yes/no ⁽¹⁾
 - 3.2.12.2.2. Oxygen sensor: yes/no ⁽¹⁾
 - 3.2.12.2.3. Air injection: yes/no ⁽¹⁾
 - 3.2.12.2.4. Exhaust gas recirculation: yes/no ⁽¹⁾
 - 3.2.12.2.5. Evaporative emissions control system: yes/no ⁽¹⁾
 - 3.2.12.2.6. Particulate trap: yes/no ⁽¹⁾
 - 3.2.12.2.7. Other systems (description and operation):
 - 3.2.13. Location of the absorption coefficient symbol (compression ignition engines only):

- 3.3. Electric motor
- 3.3.1. Type (winding, excitation):
- 3.3.1.1. Maximum hourly output: kW
- 3.3.1.2. Operating voltage: V
- 3.3.2. Battery
- 3.3.2.4. Position:

4. TRANSMISSION ^(M)

- 4.2. Type (mechanical, hydraulic, electric, etc.):
- 4.5. Gearbox
- 4.5.1. Type (manual/automatic/CVT (continuously variable transmission)) ⁽¹⁾
- 4.6. Gear ratios

Gear	Internal gearbox ratios (ratios of engine to gearbox output shaft revolutions)	Final drive ratio(s) (ratio of gearbox output shaft to driven wheel revolutions)	Total gear ratios
Maximum for CVT ⁽¹⁾			
1			
2			
3			
Minimum for CVT ⁽¹⁾			
Reverse			
⁽¹⁾ Continuously variable transmission			

- 4.7. Maximum vehicle speed (in km/h) ^(M):
6. SUSPENSION
- 6.2. Type and design of the suspension of each axle or wheel:
- 6.2.1. Level adjustment: yes/no/optional ⁽¹⁾
- 6.6.1. Tyre/Wheel combination(s)
(for tyres indicate size designation, minimum load-capacity index, minimum speed category
symbol; for wheels indicate rim size(s) and off-set(s))
- 6.6.1.1. Axles
- 6.6.1.1.1. Axle 1:
- 6.6.1.1.2. Axle 2: etc.
- 6.6.1.2. Spare wheel, if any:
- 6.6.2. Upper and lower limits of rolling radii
- 6.6.2.1. Axle 1:
- 6.6.2.2. Axle 2: etc.

B 1206

7. STEERING

7.2. Transmission and control

7.2.1. Type of steering transmission (specify for front and rear, if applicable):

7.2.2. Linkage to wheels (including other than mechanical means; specify for front and rear, if applicable):

7.2.3. Method of assistance, if any:

8. BRAKES

8.5. Anti-lock braking system: yes/no/optional ⁽¹⁾

8.9. Brief description of the braking systems (according to Item 1.6 of the Addendum to Appendix 1 of Annex IX to Directive 71/320/EEC):

9. BODYWORK

9.1. Type of bodywork:

9.3. Occupant doors, latches and hinges:

9.3.1. Door configuration and number of doors:

9.10. Interior fittings

9.10.3. Seats

9.10.3.1. Number:

9.10.3.2. Position and arrangement:

9.10.3.2.1 Seating position(s) designated for use only when the vehicle is stationary:

9.10.4.1. Type(s) of head restraints: integrated/detachable/separate ⁽¹⁾

9.10.4.2. Type-approval number(s), if available:

9.12.2. Nature and position of supplementary restraint systems (indicate yes/no/optional)

(L = left-hand side, R = right-hand side, C = centre)

		Front airbag	Side airbag	Belt preloading device
First row of seats	L			
	C			
	R			
Second row of seats ⁽¹⁾	L			
	C			
	R			

⁽¹⁾ The table may be extended as necessary for vehicles with more than two rows of seats or if there are more than three seats across the width of the vehicle

- 9.17 Statutory plates
- 9.17.1 Photographs and/or drawings of the locations of the statutory plates and inscriptions and of the chassis number:
- 9.17.4. Manufacturer's declaration of compliance with the requirement of Item 3 of Annex II to Directive 76/114/EEC
- 9.17.4.1. The meaning of characters in the second section and, if applicable, in the third section used to comply with the requirements of Item 3.1.1.2 shall be explained:
- 9.17.4.2. If characters in the second section are used to comply with the requirements of Item 3.1.1.3, these characters shall be indicated:
- 11. CONNECTIONS BETWEEN TOWING VEHICLES AND TRAILERS AND SEMI-TRAILERS**
- 11.1 Class and type of the coupling device(s) fitted or to be fitted:
- 11.3. Instructions for attachment of the coupling type to the vehicle and photographs or drawings of the fixing points at the vehicle as stated by the manufacturer; additional information, if the use of the coupling type is restricted to certain variants or versions of the vehicle type:
- 11.4 Information of the fitting of special towing brackets or mounting plates:
- 11.5 Type-approval number(s)

PART II

Matrix showing the permissible combinations into vehicle versions of those items in Part I for which there are multiple entries. For those multiple entry items each entry is denoted by a prefix letter which will be used in this matrix to denote which entry (or entries) from a particular item are applicable to a particular version.

A separate matrix must be compiled for each variant within the type.

Multiple entries for which there are no restrictions on their combination within a variant should be listed in the column headed 'all'.

Item No	All	Version 1	Version 2	Etc.	Version No.

This information may be presented in an alternative format or layout so long as the original purpose is fulfilled.

Each variant and each version must be identified by a numerical code, or number consisting of a combination of letters and numbers, which must also be indicated in the certificate of conformity (Annex IX) of the vehicle concerned.

PART III

Separate Directive approval numbers

Supply the information required by the following table in respect of the applicable subjects ⁽¹⁾ for this vehicle in Annex IV or Annex XI. (All relevant approvals for each subject must be included)

Subject	Approval number	Member State issuing the approval ⁽²⁾	Extension date	Variant(s)/ Version(s)

Signed

Position in company:

Date

⁽¹⁾ The information in respect of components need not be given here so long as such information is included in the relevant installation approval certificate.

⁽²⁾ To be indicated if not obtainable from the type-approval number.

Schedule IV

Based on Annex IV of the Directive

LIST OF REQUIREMENTS FOR THE PURPOSES OF VEHICLE TYPE-APPROVAL

PART I

List of separate Directives

(As appropriate, taking account of the scope and latest amendment to each of the separate Directives listed below)

[illegible]

Subject	Directive number	Official Journal reference	Applicability									
			M ₁	M ₂	M ₃	N ₁	N ₂	N ₃	O ₁	O ₂	O ₃	O ₄
25 Headlamps (including bulbs)	76/761/EEC	L 262, 27.9.1976, p. 96	x	x	x	x	x	x				
26 Front fog lamps	76/762/EEC	L 262, 27.9.1976, p. 122	x	x	x	x	x	x				
27 Towing hooks	77/389/EEC	L 145, 13.6.1977, p. 41	x	x	x	x	x	x				
28 Rear fog lamps	77/538/EEC	L 220, 29.9.1977, p. 60	x	x	x	x	x	x	x	x	x	x
29 Reversing lamps	77/539/EEC	L 220, 29.9.1977, p. 72	x	x	x	x	x	x	x	x	x	x
30 Parking lamps	77/540/EEC	L 220, 29.9.1977, p. 83	x	x	x	x	x	x				
31 Seat belts	77/541/EEC	L 220, 29.9.1977, p. 95	x	x	x	x	x	x				
32 Forward vision	77/649/EEC	L 267, 19.10.1977, p. 1	x									
33 Identification of controls	78/316/EEC	L 81, 28.3.1978, p. 3	x	x	x	x	x	x				
34 Defrost/Defog	78/317/EEC	L 81, 28.3.1978, p. 27	x									
35 Wash/Wipe	78/318/EEC	L 81, 28.3.1978, p. 49	x									
36 Heating systems	78/548/EEC	L 168, 26.6.1978, p. 40	x									
37 Wheel guards	78/549/EEC	L 168, 26.6.1978, p. 45	x									
38 Head restraints	78/932/EEC	L 325, 20.11.1978, p. 1	x									
39 CO ₂ emissions/Fuel consumption	80/1268/EEC	L 375, 31.12.1980, p. 38	x									
40 Engine power	80/1269/EEC	L 375, 31.12.1980, p. 46	x	x	x	x	x	x				
41 Diesel emissions	88/77/EEC	L 36, 9.2.1988, p. 33	x	x	x	x	x	x				
42 Lateral protection	89/297/EEC	L 124, 5.5.1989, p. 1					x	x			x	x
43 Spray-suppression systems	91/226/EEC	L 103, 23.4.1991, p. 5					x	x			x	x
44 Masses and dimensions (cars)	92/21/EEC	L 129, 14.5.1992, p. 1	x									
45 Safety glass	92/22/EEC	L 129, 14.5.1992, p. 11	x	x	x	x	x	x	x	x	x	x
46 Tyres	92/23/EEC	L 129, 14.5.1992, p. 95	x	x	x	x	x	x	x	x	x	x
47 Speed limiters	92/24/EEC	L 129, 14.5.1992, p. 154			x		x	x				
48 Masses and dimensions (other than vehicles referred to in item 44)	97/27/EC	L 233, 25.8.1997, p. 1		x	x	x	x	x	x	x	x	x
49 External projections of cabs	92/114/EEC	L 409, 31.12.1992, p. 17				x	x	x				
50 Couplings	94/20/EC	L 195, 29.7.1994, p. 1	x	x	x	x	x	x	x	x	x	x
51 Flammability	95/28/EC	L 281, 23.11.1995, p. 1			x							
52 Buses and coaches	1 / EC	L ...										
53 Frontal impact	96/79/EC	L 18, 21.1.1997, p. 7	x									
54 Side impact	96/27/EC	L 169, 8.7.1996, p. 1	x			x						
56 Vehicles intended for the transport of dangerous goods	98/91/EC	L 11 of 18.1.1999				x	x	x	x	x	x	x
57 Front underrun protection	2000/40/EC	L 203 of 10.8.2000, p. 9					x	x				

PART II

Where reference is made to a separate Directive in regulations 4, 5, 6, 8, 9 or 12 of these regulations an approval issued under the following Regulations of the Economic Commission for Europe (taking account of the scope⁷ and the amendment to each of the ECE regulations listed below) has to be deemed to be equivalent to an approval granted under the relevant separate Directive in the table of part I of this Schedule.

Subject	Basic Regulation number	Series of amendments	Supplement	Corrigendum
1. Sound levels	51	02	1 to 02	1 to 02
1. Replacement silencing systems	59	00	1 to 00 2 to 00	- -
2. Emissions	83	03	-	-
3. Rear protective device	58	01	-	-
5. Steering effort	79	01	-	-
6. Door latches and hinges	11	02	1 to 02	-
7. Audible warning	28	00	1 to 00 2 to 00	1 to Supplement 2 to 00
8. Rear view mirrors	46	01	1 to 01 2 to 01 3 to 01	1 to 01
9. Braking	13	09	1 to 09 2 to 09	-
9. Braking (lining)	90	01	1 to 01 2 to 01	-
10. Radio suppression	10	02	-	-
11. Diesel smoke	24	03	-	1 to 01
12. Interior fittings	21	01	1 to 01	-
13. Anti-theft	18	02	-	-
13. Immobiliser	97	00	1 to 100	-
14. Behaviour of steering device under impact	12	03	1 to 03	1 to Revision 3
15. Seat strength	17	05	-	-
16. Exterior projection	26	02	-	-
17. Speedometer	39	00	1 to 100	-
19. Seat belt anchorages	14	03	-	1 to 03
20. Installation of lighting and light signalling devices	48	01	1 to 01 2 to 02	1 to 01 2 to 01 1 to revision 1

⁷ Where the separate Directives contain installation requirements, these apply also to components and separate technical units approval in accordance with the Regulations of the Economic Commission for Europe.

B 1213

21. Retro reflectors	3	02	1 to 02 2 to 02 3 to 02	3 to 01 4 to 01
----------------------	---	----	-------------------------------	--------------------

Subject	Basic Regulation number	Series of amendments	Supplement	Corrigendum
22. End-outline/front-position (side)/rear-position (side)/stop lamps	7	02	1 to 02 2 to 02 3 to 02 4 to 02	1 to Supplement 2
22. Daytime running lamps	87	00	1 to 00	1 to 00
22. Side marker lamps	91	00	1 to 00 2 to 00	—
23. Direction indicators	6	01	1 to 01 2 to 01 3 to 01 4 to 01 5 to 01 6 to 01 7 to 01	1 to 01 2 to 01
24. Rear registration plate lamp	4	00	1 to 00 2 to 00 3 to 00 4 to 00 5 to 00 6 to 00	—
25. Headlamps (R ₁ and HS ₁)	1	01	1 to 01 2 to 01 3 to 01 4 to 01 5 to 01 6 to 01	1 to 01 1 to Supplement 3 to 01 1 to Revision 4
25. Headlamps (sealed beam)	5	02	1 to 02 2 to 02 3 to 02	1 to Revision 3
25. Headlamps (H ₁ , H ₂ , H ₃ , HB ₁ , HB ₂ , H ₄ , and/or H ₅)	8	04	1 to 04 2 to 04 3 to 04 4 to 04 5 to 04 6 to 04 7 to 04	1 to Supplement 4 to 04 1 to Revision 3
25. Headlamps (H ₄)	20	02	1 to 02 2 to 02 3 to 02 4 to 02 5 to 02	1 to Supplement 3 to 02 1 to Revision 2
25. Headlamps (halogen sealed beam)	31	02	1 to 02 2 to 02 3 to 02	1 to Revision 1

B 1214

Subject	Basic Regulation number	Series of amendments	Supplement	Corrigendum
25 Filament lamps for use in approved lamp units	37	03	1 to 03 2 to 03 3 to 03 4 to 03 5 to 03 6 to 03 7 to 03 8 to 03 9 to 03 10 to 03 11 to 03 12 to 03 13 to 03 14 to 03	1 to Supplement 9 to 03
25 Headlamps with gas-discharge light sources	98	—	—	—
25 Gas discharge light sources for use in approved gas-discharge lamp units	99	—	—	—
26 Front fog lamps	19	02	1 to 02 2 to 02 3 to 02 4 to 02 5 to 02 6 to 02	1 to Revision 3
28 Rear fog lamps	38	00	1 to 00 2 to 00 3 to 00 4 to 00 5 to 00	1 to Supplement 3 to 00
29 Reversing lamps	23	00	1 to 00 2 to 00 3 to 00 4 to 00 5 to 00	1 to Supplement 4 to 00
30 Parking lamps	77	00	1 to 00 2 to 00 3 to 00 4 to 00	1 to 00
31 Seat belts	16	04	1 to 04 2 to 04 3 to 04 4 to 04 5 to 04 6 to 04	1 to Revision 3 2 to Revision 3 (E only)
38 Head restraints	17 25	05 04		
40 Engine power	85	00	1 to 00	—
41 Diesel emission	49	02	1 to 02 2 to 02	1 to 02 2 to 02
42 Lateral protection	73	00	—	—

s	Subject	Basic Regulation number	Series of amendments	Supplement	Corrigendum
45.	Safety glass	43	00	1 to 00 2 to 00 3 to 00	—
45	Tyres, motor vehicles and their trailers	30	02	1 to 02 2 to 02 3 to 02 4 to 02 5 to 02 6 to 02 7 to 02	1 to Supplement 3 to 02
46	Tyres, commercial vehicles and their trailers	54	00	1 to 00 2 to 00 3 to 00 4 to 00 5 to 00 6 to 00 7 to 00 8 to 00 9 to 00	1 to 00 2 to 00
46.	Temporary-use spare wheels/tyres	64	00	1 to 00	—
57	Front underrun protection	93	—	—	—

Schedule V

Based on Annex V of the Directive

PROCEDURES TO BE FOLLOWED DURING VEHICLE APPROVAL

(see regulation 5 of these regulations)

1. In the case of an application made in accordance with regulation 4.1 of these regulations, the authority must :
 - (a) verify that all separate Directive approvals are applicable to the appropriate standard in the relevant separate Directive ;
 - (b) by reference to the documentation make sure that the vehicle specification(s) and the data contained in Part I of the vehicle information document are included in the data in the information packages and/or the approval certificates of the relevant separate Directive approvals; and when an item number in Part I of the information document is not included in the information package of any of the separate Directives, confirm that the relevant part or characteristic conforms to the particulars in the information folder;
 - (c) on a selected sample of vehicles from the type to be approved carry out or arrange to be carried out inspections of the vehicle parts and systems to verify that the vehicle(s) is/are built in accordance with the relevant data contained in the authenticated information package in respect of all separate Directive approvals;
 - (d) carry out or arrange to be carried out relevant installation checks in respect of separate technical units where applicable.
2. The number of vehicles to be inspected for the purposes of Paragraph 1 (c) must be sufficient to permit the proper control of the various combinations to be approved according to the following criteria :
 - engine,
 - gearbox,
 - powered axles (number, position, interconnection),
 - steered axles (number and position),
 - body styles,
 - number of doors,
 - hand of drive,
 - number of seats,
 - level of equipment.
3. In the case of an application made in accordance with regulation 4.2 of these regulations the approval authority must:
 - (a) arrange for the necessary tests and checks as required by each of the relevant separate Directives;
 - (b) verify that the vehicle conforms to the particulars in the vehicle information folder and that it meets the technical requirements of each of the relevant separate Directives;
 - (c) carry out or arrange to be carried out relevant installation checks in respect of separate technical units where applicable.

Schedule VI

Based on Annex VI of the Directive

MODEL

maximum format: A4 (210 x 297 mm)

EC TYPE-APPROVAL CERTIFICATE

Stamp of administration

Communication concerning:

- type-approval ⁽¹⁾
- extension of type-approval ⁽¹⁾
- refusal of type-approval ⁽¹⁾
- withdrawal of type-approval ⁽¹⁾

Of a type of:

- complete vehicle ⁽¹⁾
- completed vehicle ⁽¹⁾
- incomplete vehicle ⁽¹⁾
- vehicle with complete and incomplete variants ⁽¹⁾
- vehicle with completed and incomplete variants ⁽¹⁾

with regard to Directive 70/156/EEC as last amended by Directive .../.../EC

Type-approval number:

Reason for extension:

0.1 Make (trade name of manufacturer):

0.2 Type:

0.2.1 Commercial name(s) ⁽²⁾:

0.3. Means of identification of type, if marked on the vehicle:

0.3.1. Location of that marking:

0.4. Category of vehicle ⁽³⁾:

⁽¹⁾ Delete where not applicable

⁽²⁾ If not available at the time of granting the type-approval, this item shall be completed at the latest when the vehicle is introduced on the market.

⁽³⁾ As defined in Annex II A.

B 1218

- 0.5 Name and address of manufacturer of the complete vehicle ⁽¹⁾ :
- Name and address of manufacturer of the base vehicle ⁽¹⁾⁽²⁾ :
- Name and address of manufacturer of the latest built stage of the incomplete vehicle ⁽¹⁾⁽³⁾ :
- Name and address of manufacturer of the complete vehicle ⁽¹⁾⁽³⁾ :
- 0.8 Name(s) and address(es) of assembly plant(s) :

The undersigned hereby certifies the accuracy of the manufacturer's description in the attached information document of the vehicle(s) described above (a sample(s) having been selected by the approval authority and submitted by the manufacturer as prototype(s) of the vehicle type) and that the attached test results are applicable to the vehicle type.

- 1 For complete and completed vehicles/variants ⁽¹⁾ :
 The vehicle type meets/does not meet ⁽¹⁾ the technical requirements of all the relevant separate Directives as prescribed in Annex IV and Annex XI ⁽¹⁾⁽³⁾ to Directive 70/156/EEC.
- 2 For incomplete vehicles/variants ⁽¹⁾ :
 The vehicle type meets/does not meet ⁽¹⁾ the technical requirements of the separate Directives listed in the table on Side 2.
- 3 The approval is granted/refused/withdrawn ⁽¹⁾.
- 4 The approval is granted in accordance with regulation 9.2.3 of these regulations and the validity of the approval is thus limited to dd/mm/yy.

.....
(Place)

.....
(Signature)

.....
(Date)

Attachments : Information package.
 Test results (see Annex VIII).
 Name(s) and specimen(s) of the signature(s) of the person(s) authorised to sign certificates of conformity and a statement of their position in the company.

NB : If this model is used for type-approval pursuant to regulation 9.2 of these regulations, it may not bear the heading "EC vehicle type-approval certificate" except in the case referred to in Paragraph 2(c) Where the Commission has approved the report.

¹ Delete where not applicable

² See Side 2.

³ As defined in Annex II.A.

EC VEHICLE TYPE-APPROVAL CERTIFICATE

Side 2

This approval is, where incomplete and completed vehicles or variants are concerned, based on the approval(s) for incomplete vehicles listed below:

Stage 1	Manufacturer of the base vehicle:
	Type-approval number:
	Dated:
	Applicable to variants:
Stage 2:	Manufacturer:
	Type-approval number:
	Dated:
	Applicable to variants:
Stage 3:	Manufacturer:
	Type-approval number:
	Dated:
	Applicable to variants:

In the case where the approval includes one or more incomplete variants, list those variants which are complete or completed

Complete/completed variant(s)

List of requirements applicable to the approved incomplete vehicle type or variant (as appropriate, taking account of the scope and latest amendment to each of the separate Directives listed below).

Item	Subject	Directive number	Last amended	Applicable to variants

(List only subjects for which a separate Directive approval exists.)

B 1220

In the case of special purpose vehicles, exemptions granted or special provisions applied pursuant to Annex A1 and exemptions granted pursuant to regulation 9.2.3 of these regulations :

Directive number	Item number	Nature of exemption

Schedule VII

Based on Annex VII of the Directive

APPROVAL CERTIFICATE NUMBERING SYSTEM ⁽¹⁾

(see regulation 5.3 of these regulations)

1. The type-approval number shall consist of four sections for whole vehicle approvals and five sections for system, component, and separate technical unit approvals as detailed below. In all cases, the sections shall be separated by the " * " character.

Section I: The lower case letter " e " followed by the distinguishing letter(s) or number of the Member State issuing the approval :

- 1 for Germany;
- 2 for France;
- 3 for Italy;
- 4 for the Netherlands;
- 5 for Sweden;
- 6 for Belgium;
- 9 for Spain;
- 11 for the United Kingdom;
- 12 for Austria;
- 13 for Luxembourg;
- 17 for Finland;
- 18 for Denmark;
- 21 for Portugal;
- 23 for Greece;
- IRL for Ireland.

⁽¹⁾ Components and separate technical units shall be marked in accordance with the provisions of the relevant separate Directive.

B 1222

Section 2 : The number of the base Directive.

¹ Section 3 : The number of the latest amending Directive applicable to the approval.

In the case of vehicle approvals, this means the latest Directive amending an Article (or Articles) of Directive 70/156/EEC.

In the case of separate Directive approvals, this means the latest Directive containing the actual provisions with which the system, component or technical unit conforms.

Should a Directive contain different implementation dates referring to different technical standards, an alphabetical character shall be added to specify to which standard the approval was granted.

Section 4 : A four-digit sequential number (with leading zeros as applicable) to denote the base approval number. The sequence shall start from 0001 for each base Directive.

In the case of a derogatory approval pursuant to Annex XI or to regulation 9.2.3 of these regulations, the first character " " shall be replaced by the letter "D".

Section 5 : A two-digit sequential number (with leading zeros if applicable) to denote the extension. The Sequence shall start from 00 for each base approval number.

2. In the case of an approval for a vehicle Section 2 shall be omitted. In the case of a special purpose vehicle, the first character " " of Section 4 shall be replaced by the letter "P".
3. On the vehicle's statutory plate(s) only, Section 5 shall be omitted.
4. Example of the third system approval (with as yet no extension) issued by France to the braking Directive :

e 2 * 71 / 320 * 88 / 194 * 0003 * 00

or

e 2 * 88 / 77 * 91 / 542A * 0003 * 00 in the case of a Directive with two implementation stages A and B.

5. Example of the second extension to the fourth vehicle approval issued by the United Kingdom :

e 11 * 92 / 53 * 0004 * 02

Directive 92/53/EEC being up to now the latest Directive amending the Articles of Directive 70/156/EEC.

6. Example of the approval number stamped on the vehicle's statutory plate(s) :

e 11 * 92 / 53 * 0004.

Schedule VIII

Based on Annex VIII of the Directive

TEST RESULTS

(To be completed by the approval authority and attached to the vehicle approval certificate)

In each case the information must make clear to which variant and version it is applicable. One version may not have more than one result.

However, a combination of several results per version indicating the worst case is permissible.

1. Results of the sound level tests

Variant/Version:			
Moving (dB(A)/E):			
Stationary (dB(A)/E):			
At (min ⁻¹):			

2. Results of the exhaust emission tests with indication of the testing method used (the results are expressed in the measuring unit corresponding to the testing method)

2.1. Diesel

Variant/Version			
CO			
HC			
NO _x			
HC + NO _x			
Particulates			

2.2. Petrol

Variant/Version			
CO (Type I)			
CO % (Type II)			
HC			
NO _x			
HC + NO _x			

3 Results of the CO₂ emission/fuel consumption tests

Variant/Version.			
CO ₂ mass emission (g/km)			
Fuel consumption (urban conditions) (l/100 km)			
Fuel consumption (extra-urban conditions) (l/100 km)			
Fuel consumption (combined) (l/100 km)			

4. Results of the test under free acceleration

Variant/Version			
Corrected value of the absorption coefficient (m ⁻¹).			

Schedule IX

Based on Annex IX of the Directive

PART I

MODEL

(Maximum format: A4 (210 x 297 mm), or a folder of A4 format)

EEC CERTIFICATE OF CONFORMITY

for complete/completed ⁽¹⁾ vehicles

Side 1

The undersigned:
(Full name)

hereby certifies that the vehicle

0.1. Make:
(Trade name of manufacturer)

0.2. Type:

Variant ⁽²⁾:

Version ⁽²⁾:

0.2.1 Commercial name(s):

0.4 Category:

0.5. Name and address of the manufacturer of the base vehicle:.....

Name and address of the manufacturer of the latest built stage of the vehicle ⁽¹⁾:

⁽¹⁾ Delete where not applicable

⁽²⁾ Indicate also the numerical or combined number/letter identification code. This code shall contain not more than 25 or 35 positions for a variant or version respectively.

B 1226

0.6 Location of the statutory plates
 Vehicle identification number:
 Location of the vehicle identification number on the chassis
 based upon the type(s) of vehicle described in approval ⁽¹⁾
 Base Vehicle: Manufacturer:
 Type-approval number
 Dated:
 Stage 2: Manufacturer:
 Type-approval number
 Dated:
 conforms in all respects to the complete/completed ⁽¹⁾ type described in:
 Type-approval number
 Dated
 The vehicle can be permanently registered without further approvals in Member States having
 right/left ⁽¹⁾ hand traffic and using metric/imperial ⁽¹⁾ units for the speedometer.

 (Place) (Date)

 (Signature) (Position)
 Attachments (only applicable to multi-stage vehicle types): certificate of conformity for each stage.

⁽¹⁾ Delete where not applicable

Side 2

For complete or completed vehicles of Category M₁

(The values and units indicated below are those given in the type-approval documentation of the relevant Directives)

In case of conformity of production (COP) tests, the values must be verified according to the methods laid down in the relevant Directives taking into account the COP test tolerances allowed in those Directives)

- 1 Number of axles: and wheels:
- 2 Powered axles:
- 3 Wheel base: mm
- 5 Axle(s) track: 1 mm 2 mm 3 mm
- 6 1 Length: mm
- 7 1 Width: mm
- 8 Height mm
- 11 Rear overhang: mm
- 12.1 Mass of the vehicle with bodywork in running order: kg
- 12.2 Mass of the vehicle (excluding driver, coolant, oil, fuel): kg
- 14.1 Technically permissible maximum laden mass kg
- 14.2 Distribution of this mass among the axles:
 - 1 kg 2 kg 3 kg
- 14.3 Technically permissible mass on each axle:
 - 1 kg 2 kg 3 kg
- 16 Maximum permissible roof load: kg
- 17 Maximum mass of trailer:

(braked): kg; (unbraked): kg
- 18 Maximum mass of combination: kg

B 1228

- 19 1 Maximum vertical load at the coupling point for a trailer: kg
- 20 Engine manufacturer:
- 21 Engine code:
- 22 Working principle:
- 22 1 Direct injection: yes/no ⁽¹⁾
- 23 Number and arrangement of cylinders:
- 24 Capacity: cm³
- 25 Fuel:
- 26 Maximum net power: kW at min⁻¹
- 27 Clutch (type):
- 28 Gearbox (type):
- 29 Gear ratios: 1. 2. 3. 4. 5. 6.
- 30 Final drive ratio:
- 32 Tyres and wheels: Axle 1: Axle 2: Axle 3:
- 34 Steering method of assistance:
- 35 Brief description of the braking system:
- 37 Type of body:
- 38 Colour of vehicle ⁽²⁾
- 41 Number and configuration of doors:
- 42 1 Number and position of seats:
- 43 1 Approval mark of coupling device, if fitted:
- 44 Maximum speed: km/h
- 45 Sound level: Stationary: dB(A) at engine speed: min⁻¹
Drive-by: dB(A)

⁽¹⁾ Delete where not applicable

⁽²⁾ Indicate only the basic colour(s) as follows: white, yellow, orange, red, violet, blue, green, grey, brown or black.

- 46.1 Exhaust emissions ⁽¹⁾: CO: HC: NO_x:
 HC + NO_x: Particulates:
- 46.2 CO₂ emissions/fuel consumption g/km
 — urban conditions l/100 km
 — extra-urban conditions: l/100 km
 — combined: l/100 km
- 47 Fiscal power or national code number(s):
 Italy France: Spain:
 Belgium Germany Luxembourg:
 Denmark Netherlands: Greece:
 United Kingdom Ireland: Portugal:
 Austria Sweden Finland:
50. Remarks:
- 51 Exemptions:

⁽¹⁾ Indicate the number of the applicable Directive.

B 1230

PART II

MODEL

(Maximum format: A 4 (210 x 297 mm), or a folder of A4 format))

CERTIFICATE OF CONFORMITY

for incomplete vehicles

Side 1

The undersigned:
(Full name)

hereby certifies that the vehicle:

0.1 Make:
(Trade name of manufacturer)

0.2 Type:
Variant ⁽¹⁾:
Version ⁽¹⁾:

0.4 Category:

0.5 Name and address of the manufacturer of the base vehicle:

Name and address of the manufacturer of the latest built stage of the vehicle ⁽²⁾:

0.6 Location of the statutory plates:

Vehicle identification number:
based upon the type(s) of vehicle described in approval ⁽²⁾

Base Vehicle: Manufacturer:

Type-approval number:

Dated:

⁽¹⁾ Indicate also the numerical or combined number/letter identification code. This code shall contain not more than 25 or 35 positions for a variant or version respectively

⁽²⁾ Delete where not applicable

Stage 2: Manufacturer:

Type-approval number:

Dated:

conforms in all respects to the incomplete type described in

Type-approval number:

Dated:

The vehicle cannot be permanently registered without further approvals.

.....

(Place)

.....

(Date)

.....

{Signature}

.....

{Position}

Attachments certificate of conformity for each stage.

B 1232

Side 2

For incomplete vehicles of Category M.

(The values and units indicated below are those given in the type-approval documentation of the relevant Directives.)

In case of conformity of production (COP) tests, the values must be verified according to the methods laid down in the relevant Directives taking into account the COP test tolerances allowed in those Directives.)

- 1 Number of axles: and wheels:
- 2 Powered axles:
- 3 Wheel base: mm
- 5 Axle(s) track: 1 mm 2 mm 3 mm
- 6 2 Maximum permissible length of the completed vehicle: mm
- 7 2 Maximum permissible width of the completed vehicle mm
- 9 1 Height of the centre of gravity (c.o.g.): mm
- 9 2 Maximum permissible height of the c.o.g. of the completed vehicle: mm
- 9 3 Minimum permissible height of the c.o.g. of the completed vehicle: mm
- 13 1 Minimum permissible mass of the completed vehicle: kg
- 13 2 Distribution of this mass among the axles:
1 kg 2 kg 3 kg
- 14 1 Technically permissible maximum laden mass: kg
- 14 2 Distribution of this mass among the axles:
1 kg 2 kg 3 kg
- 14 3 Technically permissible mass on each axle
1 kg 2 kg 3 kg
- 16 Maximum permissible roof load: kg

B 1233

- 17 Maximum mass of trailer* (braked) kg (unbraked): kg
- 18 ^b Maximum mass of combination kg
- 19 1 Maximum vertical load at the coupling point for a trailer kg
- 20 Engine manufacturer
- 21 Engine code
- 22 Working principle:
- 22 1 Direct injection yes/no ⁽¹⁾
- 23 Number and arrangement of cylinders
- 24 Capacity cm³
- 25 Fuel
- 26 Maximum net power* kW at min⁻¹
- 27 Clutch (type):
- 28 Gearbox (type):
- 29 Gear ratios* 1 2 3 4 5 6
- 30 Final drive ratio
- 32 Tyres and wheels* Axle 1 Axle 2: Axle 3:
- 34 Steering, method of assistance:
- 35 Brief description of the braking system:
- 41 Number and configuration of doors
- 42 1 Number and position of seats:
- 43 1 Approval mark of coupling device, if fitted
- 43 3 Types or classes of coupling devices which can be fitted:
- 43 4 Characteristic values ⁽¹⁾: D/V/S/U

⁽¹⁾ Delete where not applicable

B 1234

45	Sound level:	Stationary	 dB(A)	at engine speed:min ⁻¹
		Drive-by:	 dB(A)	
46 1	Exhaust emissions ⁽¹⁾	CO:	HC:	NO _x :
		HC + NO _x	Particulates:	
47	Fiscal power or national code number(s):			
	Italy	France:	Spain:	
	Belgium	Germany:	Luxembourg:	
	Denmark	Netherlands	Greece:	
	United Kingdom:	Ireland:	Portugal:	
	Austria	Sweden:	Finland:	
49	Chassis designed for off-road vehicles only		yes/no ⁽²⁾	
50	Remarks:			
51	Exemptions:			

⁽¹⁾ Indicate the number of the applicable Directive

⁽²⁾ Delete where not applicable

Schedule X

Based on Annex X of the Directive

CONFORMITY OF PRODUCTION PROCEDURES

0. CONFORMITY OF PRODUCTION

Conformity of production to ensure conformity to the approved type as referenced in regulation 11 of these regulations including assessment of quality management systems referenced below as initial assessment ⁽¹⁾ and verification of the approval subject and product related controls referenced below as product conformity arrangements.

1. INITIAL ASSESSMENT

1.1. The approval authority of a Member State must verify, before granting type-approval, the existence of Satisfactory arrangements and procedures for ensuring effective control so that components, systems, separate technical units or vehicles when in production conform to the approved type.

1.2. The requirement in Point 1.1 of this Schedule must be verified to the satisfaction of the authority granting type-approval. That authority shall be satisfied with the initial assessment and the initial product conformity arrangements at section 2 of this Schedule, taking account, as necessary, of one of the arrangements described at points 1.2.1 to 1.2.3 of this Schedule, or a combination of those arrangements in full or in part as appropriate.

1.2.1 The actual initial assessment and/or verification of product conformity arrangements may be carried out by the approval authority granting type-approval or a technical service on behalf of the approval authority.

1.2.1.1 When considering the extent of the initial assessment to be carried out, the approval authority may take account of available information relating to :

- the manufacturer's certification described in point 1.2.3 of this Schedule which has not been qualified or recognised under that paragraph,
- in the case of component or separate technical unit approval, quality system assessments performed in the component or separate technical unit manufacturer's premises by vehicle manufacturer(s), according to one or more of the industry sector specifications satisfying the requirements in harmonised standard MSA EN ISO 9002:2000.

⁽¹⁾ Guidance on the planning and conduct of assessment is to be found in harmonised standards MSA ISO 10011-1:2002, MSA ISO 10011-2:2002 and MSA ISO 10011-3:2002.

- 1.2.2 The actual initial assessment and/or verification of product conformity arrangements may also be carried out by the approval authority of another Member State or the technical service designated for this purpose by the approval authority. In that case, the approval authority of the other Member State shall prepare a statement of compliance outlining the areas and production facilities it has covered as relevant to the product(s) to be type approved and to the directive according to which these products are to be approved⁽¹⁾. On receiving an application for a compliance statement from the approval authority of a Member State granting type-approval, the approval authority of another Member State shall send forthwith the statement of compliance or advise that it is not in a position to provide such a statement. The statement of compliance should at least include

Group or company	(e.g. XYZ Automotive)
Particular organisation	(e.g. European Division)
Plants/Sites	(e.g. Engine Plant 1 (United Kingdom) Vehicle Plant 2 (Germany))
Vehicle/Component range	(e.g. All Category M ₁ models)
Areas assessed	(e.g. Engine assembly, body pressing and assembly, vehicle assembly)
Documents examined	(e.g. Company and site quality manual and procedures)
Assessment:	(e.g. Conducted: 18 - 30/9/94) (e.g. Planned monitor visit: March 1996)

- 1.2.3 The approval authority must also accept the manufacturer's suitable certification to harmonised standard EN ISO 9002 — 1994 (whose scope covers the locations of production and product(s) to be approved) or an equivalent harmonised standard as satisfying the initial assessment requirements of Point 1.2. The manufacturer must provide details of the certification and undertake to inform the approval authority of any revisions to its validity or scope.

"Suitable" means granted by a certification body complying with harmonised standard EN 45012 and either qualified as such by the approval authority of a Member State itself, or accredited as such by a national accreditation organisation of a Member State and recognised by that Member State's approval authority.

The approval authorities of the Member State shall inform each other of the certification bodies they have qualified or recognised as abovementioned, and of any revision to the validity or scope of these bodies.

- 1.3. For the purpose of the whole vehicle type-approval, the initial assessments carried out for granting of approvals for systems, components and technical units of the vehicle need not be repeated, but shall be completed by an assessment covering the locations and activities relating to the assembly of the whole vehicle not covered by the former assessments.

⁽¹⁾ For example, the relevant separate Directive if the product to be approved is a system, component or technical unit, and Directive 70/156/EEC if it is a whole vehicle.

2. PRODUCT CONFORMITY ARRANGEMENTS

- 2.1. Every vehicle, system, component or separate technical unit approved pursuant to this Directive or a separate Directive must be so manufactured as to conform to the type approved by meeting the requirements of this Directive or a separate Directive contained in the complete list set out in Annex IV or XI.
- 2.2. The approval authority of a Member State, at the time of granting a type-approval, must verify the existence of adequate arrangements and documented control plans, to be agreed with the manufacturer for each approval to carry out at specified intervals those tests or associated checks necessary to verify continued conformity with the approved type including specifically, where applicable, tests specified in the separate Directives.
- 2.3. The holder of the approval must, in particular:
 - 2.3.1 ensure the existence and application of procedures for effective control of the conformity of products, (vehicles, systems, components or separate technical units) to the approved type;
 - 2.3.2 have access to the testing or other appropriate equipment necessary for checking the conformity to each approved type;
 - 2.3.3 ensure that test or check results data are recorded and that annexed documents remain available for a period to be determined in agreement with the approval authority. This period is not required to exceed 10 years.
 - 2.3.4 analyse the results of each type of test or check, in order to verify and ensure the stability of the product characteristics, making allowance for variation of an industrial production;
 - 2.3.5 ensure that for each type of product, at least the checks prescribed in this Directive and the tests prescribed in the applicable separate Directives contained in the complete list set out in Annex IV or XI are carried out.
 - 2.3.6 ensure that any set of samples or test pieces, giving evidence of non-conformity in the type of test or check in question gives rise to a further sampling and test or check. All the necessary steps shall be taken to restore conformity of the corresponding production;
 - 2.3.7 in the case of whole-vehicle approval, the checks referred to in Point 2.3.5 are restricted to those verifying the correct build specification in relation to the approval and especially to the information document laid down in Annex III and the information required for certificates of conformity given in Annex IX to this Directive.

3. CONTINUED VERIFICATION ARRANGEMENTS

- 3.1. > The authority which has granted type-approval may at any time verify the conformity control methods applied in each production facility.
- 3.1.1 The normal arrangements shall be to monitor the continued effectiveness of the procedures established at 1.2 (initial assessment and product conformity) of this Annex.
- 3.1.1.1 Surveillance activities carried out by a certification body (qualified or recognised as required by Paragraph 1.2.3 of this Annex) must be accepted as satisfying the requirements of 3.1.1 with regard to the procedures established at initial assessment (Paragraph 1.2.3).
- 3.1.1.2 The normal frequency of verifications by the approval authority (other than those at 3.1.1.1) shall be such as to ensure that the relevant controls applied in accordance with Sections 1 and 2 of this Annex are reviewed over a period consistent with the climate of trust established by the approval authority.
- 3.2. At every review records of tests or checks and records of production shall be made available to the inspector; in particular, records of those tests or checks documented as required by Point 2.2 of this Annex.
- 3.3. Where the nature of the test is appropriate, the inspector may select samples at random to be tested in the manufacturer's laboratory (or by the technical service where the separate Directive so provides). The minimum number of samples may be determined according to the results of the manufacturer's own verification.
- 3.4. Where the level of control appears unsatisfactory, or when it seems necessary to verify the validity of the tests carried out in application of Point 3.2 the inspector must select samples to be sent to the technical service which conducted the type-approval tests.
- 3.5. The approval authority may carry out any check or test prescribed in this Directive or in the applicable separate Directives contained in the complete list set out in Annex IV or XI.
- 3.6. In cases where unsatisfactory results are found during an inspection or a monitoring review, the approval authority must ensure that all necessary steps are taken to restore conformity of production as rapidly as possible.
-

Schedule XI

Based on Annex XI of the Directive

NATURE OF AND PROVISIONS FOR SPECIAL - PURPOSE VEHICLES

(see regulation 5 of these regulations)

APPENDIX 1

MOTOR CARAVANS - AMBULANCES - HEARSEs

Item	Subject	Directive number	$M_1 \leq 2\,500^{(1)}$ kg	$M_1 > 2\,500^{(1)}$ kg
1	Sound levels	70/157/EEC	H	G + H
2	Emissions	70/220/EEC	Q	G + Q
3	Fuel tanks/Rear protection devices	70/221/EEC	F	F
4	Rear registration plate space	70/222/EEC	X	X
5	Steering effort	70/311/EEC	X	G
6	Door latches and hinges	70/387/EEC	B	G + B
7	Audible warning	70/388/EEC	X	X
8	Rear visibility	71/217/EEC	X	G
9	Braking	71/320/EEC	X	G
10	Suppression (radio)	72/245/EEC	X	X
11	Diesel smoke	72/306/EEC	H	H
12	Interior fittings	74/60/EEC	C	G + C
13	Anti-theft and immobiliser	74/61/EEC	X	G
14	Protective steering	74/297/EEC	X	G
15	Seat strength	74/408/EEC	D	G + D
16	Exterior projections	74/483/EEC	X for the cab; A for the remaining part	G for the cab; A for the remaining part
17	Speedometer and reverse gear	75/443/EEC	X	X
18	Plates (statutory)	76/114/EEC	X	X
19	Seat belt anchorages	76/115/EEC	D	G + L
20	Installation of lighting and light signalling devices	76/756/EEC	A + N	A + G + N for the cab; A + N for the remaining part
21	Retro reflectors	76/757/EEC	X	X
22	End-outline, front-position (side), rear-position (side), stop, side marker, daytime running lamps	76/758/EEC	X	X
23	Direction indicators	76/759/EEC	X	X

Item	Subject	Directive number	$M_1 \leq 2\,500^{(1)} \text{ kg}$	$M_1 > 2\,500^{(1)} \text{ kg}$
24	Rear registration plate lamps	76/760/EEC	X	X
25	Headlamps (including bulbs)	76/761/EEC	X	X
26	Front fog lamps	76/762/EEC	X	X
27	Towing hooks	77/389/EEC	E	E
28	Rear fog lamps	77/538/EEC	X	X
29	Reversing lamps	77/539/EEC	X	X
30	Parking lamps	77/540/EEC	X	X
31	Seat belts	77/541/EEC	D	G + M
32	Forward vision	77/649/EEC	X	G
33	Identification of controls	78/316/EEC	X	X
34	Defrost/Demist	78/317/EEC	X	G + O
35	Wash/Wipe	78/318/EEC	X	G + O
36	Heating systems	78/548/EEC	I	G + P
37	Wheel guards	78/549/EEC	X	G
38	Head restraints	78/932/EEC	D	G + D
39	Fuel consumption	80/1268/EEC	N/A	N/A
40	Engine power	80/1269/EEC	X	X
41	Diesel emissions	88/77/EEC	H	G + H
44	Masses and dimensions (cars)	92/21/EEC	X	X
45	Safety glass	92/22/EEC	J	G + J
46	Tyres	92/23/EEC	X	G
50	Couplings	94/20/EC	X	G
53	Frontal impact	96/79/EC	N/A	N/A
54	Side impact	96/27/EC	N/A	N/A

⁽¹⁾ Technical permissible maximum laden mass.

MEANING OF LETTERS

A	Exemption permitted where special purposes makes it impossible to fully comply. The manufacturer shall demonstrate to the satisfaction of the approval authority that it cannot meet the requirements due to the special purpose.
B	Application limited to doors giving access to the seats designated for normal use when the vehicle is travelling on the road, and where the distance between the R-point of the seat and the average plan of the door surface, measured perpendicular to the longitudinal median plane of the vehicle, does not exceed 500 mm.
C	Application limited to that part of the vehicle in front of the rearmost seat designated for normal use when the vehicle is travelling on the road and also limited to the head impact zone as defined in Directive 74/60/EEC.
D	Application limited to seats designated for normal use when the vehicle is travelling on the road.
E	Front only
F	Modification to the routing and length of the refuelling duct and re-positioning of the tank inboard is permissible.
G	Requirements according to the category of the base/incomplete vehicle (the chassis of which was used to build the special purpose vehicle). In the case of incomplete/completed vehicles, it is acceptable that the requirements for vehicles of the corresponding Category N (based on maximum mass) are satisfied.
H	Modification of exhaust system length after the last silencer/catalytic converter not exceeding 2 m is permissible without any further test.
I	Application limited to those heating systems not specially designed for habitation purposes.
J	For all window glazing other than driver's cab glazing (windshield and side glasses), the material may be either of safety glass or rigid plastic glazing.
K	Reserved
L	Application limited to seats designated for normal use when the vehicle is travelling on the road. At least anchorages for lap belts are required in the rear seating positions.
M	Application limited to seats designated for normal use when the vehicle is travelling on the road. At least lap belts are required in all rear seating positions.
N	Provided that all mandatory lighting devices are installed and that the geometric visibility is not affected.
O	The vehicle shall be fitted with an adequate system in the front.
P	Application limited to those heating systems not specially designed for habitation purposes. The vehicle shall be fitted with an adequate system in the front.
Q	Modification of exhaust system length after the last silencer/catalytic converter not exceeding 2 m is permissible without any further test. An approval issued to the most representative base vehicle remains valid irrespective of change in the reference weight.
R	No exemptions except those specified in the separate Directive.
N/A	This Directive is not applicable (no requirements).

APPENDIX 2

ARMoured VEHICLES

Item	Subject	Directive number	Armoured vehicles of Category M ₁
1	Sound levels	70/157/EEC	X
2	Emissions	70/220/EEC	A
3	Fuel tanks/Rear protective devices	70/221/EEC	X
4	Rear registration plate space	70/222/EEC	X
5	Steering effort	70/311/EEC	X
6	Door latches and hinges	70/387/EEC	X
7	Audible warning	70/388/EEC	A + C
8	Rear visibility	71/127/EEC	B
9	Braking	71/320/EEC	X
10	Suppression (radio)	72/245/EEC	X
11	Diesel smoke	72/306/EEC	X
12	Interior fittings	74/60/EEC	A
13	Anti-theft and immobiliser	74/61/EEC	X
14	Protective steering	74/297/EEC	N/A
15	Seat strength	74/408/EEC	X
16	Exterior projections	74/483/EEC	A
17	Speedometer and reverse gear	75/443/EEC	X
18	Plates (statutory)	76/114/EEC	X
19	Seat belt anchorages	76/115/EEC	A
20	Installation of lighting and light signalling devices	76/756/EEC	A + N
21	Retro reflectors	76/757/EEC	X
22	End-outline, front position (side), rear-position (side), stop, side marker, daytime running lamps	76/758/EEC	X
23	Direction indicators	76/759/EEC	X
24	Rear registration plate lamps	76/760/EEC	X
25	Headlamps (including bulbs)	76/761/EEC	X
26	Front fog lamps	76/762/EEC	X
27	Towing hooks	77/389/EEC	A
28	Rear fog lamps	77/538/EEC	X
29	Reversing lamps	77/539/EEC	X
30	Parking lamps	77/540/EEC	X
31	Seat belts	77/541/EEC	A

Item	Subject	Directive number	Armoured vehicles of Category M ₁
32	Forward vision	77/649/EEC	B
33	Identification of controls	78/316/EEC	X
34	Defrost/Demist	78/317/EEC	A
35	Wash/Wipe	78/318/EEC	A
36	Heating systems	78/548/EEC	X
37	Wheel guards	78/549/EEC	X
38	Head restraints	78/932/EEC	X
39	Fuel consumption	80/1268/EEC	N/A
40	Engine power	80/1269/EEC	X
41	Diesel emissions	88/77/EEC	A
44	Masses and dimensions (cars)	92/21/EEC	X
45	Safety glass	92/22/EEC	N/A
46	Tyres	92/23/EEC	N/A
50	Couplings	94/20/EC	X
53	Frontal impact	96/79/EC	N/A
54	Side impact	96/27/EC	N/A

MEANING OF LETTERS

- A: Exemption permitted where special purposes makes it impossible to fully comply. The manufacturer shall demonstrate to the satisfaction of the approval authority that it cannot meet the requirements due to the special purpose.
- B: The light transmission factor is at least 60%, also the "A" pillar obscuration angle is not more than 10°.
- C: Additional panic alarm devices permitted.
- N: Provided that all mandatory lighting devices are installed and that the geometric visibility is not affected.
- X: No exemptions except those specified in the separate Directive.
- N/A: This Directive is not applicable (no requirements)

Schedule XII

Based on Annex XII of the Directive

A. SMALL SERIES LIMITS

(see regulation 9.2.1. of these regulations)

The number of units of one family of types as defined below to be registered sold or entered into service per year in one member State shall not exceed the figure shown below for the vehicle category in question.

Category	Units
M ₁	500

A 'family of types' shall consist of vehicles which do not differ in the following essential respects :

- the manufacturer,
- essential aspects of construction and design :
- chassis/floor pan (obvious and fundamental differences),
- power plant (internal combustion/electric/hybrid).

B. END - OF - SERIES LIMITS

(see regulation 9.2.2 of these regulations)

The maximum number of complete and completed vehicles put into service in each Member State under the procedure laid down in regulation 9.2.1 of these regulations shall be restricted in one of the following ways to be chosen by the Member State :

Either

1. the maximum number of vehicles of one or more types may, in the case of Category M₁, not exceed 10% and in the case of all other categories not exceed 30% of the vehicles of all types concerned put into service in that Member State during the previous year.

Should 10%, respectively 30%, be less than 100 vehicles, then the Member State may allow the Putting into service of a maximum of 100 vehicles;

Or

2. vehicles of any one type shall be restricted to those for which a valid certificate of conformity was issued on or after the date of manufacture and which remained valid for at least three months after its date of issue but subsequently lost its validity because of coming into force of a separate Directive.

A special entry shall be made on the certificate of conformity of the vehicles put into service under this procedure.

Schedule XIII

Based on Annex XIII of the Directive

LIST OF SEPARATE DIRECTIVE APPROVALS ISSUED

Approval authority stamp

List number

Covering the period to

The following information in respect of each approval granted, refused or withdrawn in the abovementioned period must be given.

Manufacturer

Approval number

Reason for extension (where applicable):

Make

Type

Date of issue

First date of issue (in the case of extensions)

Schedule XIV

Based on Annex XIV of the Directive

PROCEDURES TO BE FOLLOWED DURING MULTI-STAGE TYPE-APPROVAL

(see regulation 5 of these regulations)

1. GENERAL

- 1.3. The satisfactory operation of the process of multi-stage type-approval requires joint action by all the manufacturers concerned. To this end approval authorities must ensure, before granting first and subsequent stage approval, that suitable arrangements exist between the relevant manufacturers for the supply and interchange of documents and information such that the completed vehicle type meets the technical requirements of all the relevant separate Directives as prescribed in Annex IV or Annex XI. Such information must include details of relevant system, component and separate technical unit approvals and of vehicle parts which form part of the incomplete vehicle but are not yet approved.
- 1.4. Type-approvals in accordance with this Annex are granted on the basis of the current state of completion of the vehicle type and must incorporate all approvals granted at earlier stages.
- 1.5. Each manufacturer in a multi-stage approval process is responsible for the approval and conformity of Production of all systems, components or separate technical units manufactured by him or added by him to the previously built stage. He is not responsible for subjects which have been approved in an earlier stage in those cases where he modifies relevant parts to an extent that the previously granted approval becomes invalid.

2. PROCEDURES

In the case of an application made in accordance with regulation 4.3 of these regulations, the approval authority must :

- (a) verify that all relevant separate Directive approvals are applicable to the appropriate standard in the separate Directive;
- (b) ensure that all the relevant data, taking account of the state of completion of the vehicle, is included in the information folder;
- (c) by reference to the documentation make sure that the vehicle specification(s) and data contained in Part I of the vehicle information folder are included in the data in the information packages and/or the approval certificates of the relevant separate Directive approvals; and in the case of a completed vehicle, where an item number in Part I of the information folder is not included in the information package of any of the separate Directives, confirm that the relevant part of characteristic conforms to the particulars in the information folder;
- (d) on a selected sample of vehicles from the type to be approved carry out or arrange to be carried out inspections of vehicle parts and systems to verify that the vehicle(s) is/are built in accordance with the relevant data contained in the authenticated information package in respect of all relevant separate Directive approvals;
- (e) carry out or arrange to be carried out relevant installation checks in respect of separate technical units where applicable.

3. The number of vehicles to be inspected for the purposes of Paragraph 2(d) must be sufficient to permit the proper control of the various combinations to be approved according to the state of completion of the vehicle and the following criteria:

- engine,
- gearbox,
- powered axes (number, position, interconnection),
- steered axes (number and position),
- body styles,
- number of doors
- hand of drive,
- number of seats,
- level of equipment.

4. IDENTIFICATION OF THE VEHICLE

At the second and subsequent stages, in addition to the statutory plate prescribed by Directive 76/114/EEC (as last amended), each manufacturer must affix to the vehicle an additional plate the model of which is shown in the appendix to this Annex. This plate must be firmly attached, in a conspicuous and readily accessible position on a part not subject to replacement in use. It must show clearly and indelibly the following information in the order listed:

- name of the manufacturer,
- Sections 1, 3 and 4 of the EC type-approval number,
- the stage of approval,
- vehicle serial number,
- maximum permissible laden mass of the vehicle ^(a)
- maximum permissible laden mass of the combination (where the vehicle is permitted to tow a trailer) ^(a)
- maximum permissible mass on each axle, listed in order from front to rear ^(a)
- in the case of a semi-trailer, the maximum permitted mass on the fifth wheel king pin ^(a),

^(a) Only where the value has changed during the current stage of approval.

APPENDIX

MODEL OF THE MANUFACTURER'S ADDITIONAL PLATE

The example below is given as a guide only.

HENSSLER BODYWORK COMPANY
e 2*91/289*2609
Stage 3
1 856
1 500 kg
2 500 kg
1-700 kg
2-810 kg

Schedule XV

Based on Annex XV of the Directive

Manufacturers declaration of base/incomplete vehicle of Category other than M₁

CERTIFICATE OF ORIGIN OF THE VEHICLE

Declaration number

In accordance with Article 2(10) of Directive 98/14/EC the undersigned hereby declares that the vehicle as specified below, has been manufactured in his own factory and that it is a newly manufactured vehicle.

0.1 Make (trade name of manufacturer)

0.2 Type of vehicle

0.2.1 Commercial name(s)

0.3 Means of identification of type:

0.8 Address(es) of assembly plant(s)

Moreover, the undersigned declares that the vehicle when delivered complied with the following Directives:

Subject	Directive number	Approval number	Member State granting type-approval ⁽¹⁾
1 Sound level			
2 Emissions			
3			
etc			

⁽¹⁾ To be indicated if not obtainable from the type-approval numbers.

The present declaration is issued according to the provisions established in Annex XI to Directive 98/14/EC

.....
(Place)

.....
(Signature)

.....
(Date)

